

Datalight ROM-DOS™ 6.22

User's Guide

Printed: July 1999

Datalight **ROM-DOS**[™] User's Guide

Copyright © 1993 - 1999 by Datalight, Inc.

All Rights Reserved

Datalight, Inc. assumes no liability for the use or misuse of this software. Liability for any warranties implied or stated is limited to the original purchaser only and to the recording medium (disk) only, not the information encoded on it.

THE SOFTWARE DESCRIBED HEREIN, TOGETHER WITH THIS DOCUMENT, ARE FURNISHED UNDER A LICENSE AGREEMENT AND MAY BE USED OR COPIED ONLY IN ACCORDANCE WITH THE TERMS OF THAT AGREEMENT.

Datalight® is a registered trademark of Datalight, Inc.
ROM-DOS[™] and FlashFX[™] are trademarks of Datalight, Inc.
Microsoft® and MS-DOS® are registered trademarks of Microsoft Corporation.
All other trademarks are the property of their respective holders.

Part Number: 0200-0110

Contents

Chapter 1, Introduction	1
Conventions Used in this Manual.....	1
Terminology Used in this Manual.....	1
Random Access Memory (RAM).....	2
Read Only Memory (ROM).....	2
Disks and Disk Drives	2
Floppy Disks.....	2
Hard Drives	2
RAM Disks	3
ROM Disks	3
Flash Memory Disks	3
Chapter 2, Files, Directories, and Command Line Entries	5
Naming Files	5
Filenames	5
Filename Extensions	5
Tree-Structured Directory System	6
Naming Subdirectories.....	6
Moving around the Directory Tree	6
Drive Specifications	7
Using Wildcard Characters	7
System Prompt.....	8
Command Line.....	8
Redirecting Input and Output.....	9
Input Redirection	9
Output Redirection.....	9
Chapter 3, Using Batch Files	11
Batch Filenames	11
Creating a Batch File	11
Batch File Command Line Parameters	11
Batch File Commands.....	12
Chapter 4, Configuring ROM-DOS	13
Basic Configuration	13
Using Multiple-User Configurations	13
Extending Menu Items to AUTOEXEC.BAT.....	15
Bypassing CONFIG.SYS and AUTOEXEC.BAT Commands	16
Stepping Through CONFIG.SYS and AUTOEXEC.BAT Commands.....	16
Environment Variables	17
Configuring ROM-DOS for International Use.....	17
Changing Country Conventions	18
Displaying Different Code Pages.....	19
Printing Different Code Pages.....	19
Changing the Keyboard Layout	19
Configuring Your System: an Example	21

Chapter 5, Command Descriptions	23
Command Summary	23
Command Descriptions	26
?	26
@	27
;	27
ANSI.SYS	28
ATA.SYS	28
ATTRIB	29
BACKUP	30
BREAK	31
BUFFERS	32
CALL	32
CHDIR (CHange DIRectory).....	33
CHKDSK (CHecK DiSK)	34
CHOICE	35
CLS (CLear Screen).....	36
COMMAND	36
COPY	37
COUNTRY	39
CTTY (Change TeleTYpe)	40
DATE	40
DEFRAG	41
DEL (DElete)	42
DELTREE	43
DEVICE	43
DEVICEHIGH	44
DIR (DIRectory)	44
DISKCOPY	46
DISPLAY	47
DOS	47
ECHO	48
EGA.CPI/EGA3.CPI	49
EMM386	49
ERASE	51
EXIT	52
FCBS	52
FDISK	52
FILES	54
FIND	54
FOR	55
FORMAT	55
GOTO	57
HELP	57
HIMEM	58
IF	59

INCLUDE.....	60
INSTALL	60
KEYB.....	61
KEYBOARD.SYS/KEYBRD2.SYS	62
LABEL	62
LASTDRIVE	63
LOADHIGH	63
LONGDIR.EXE.....	64
MEM.....	65
MENUCOLOR	65
MENUDEFAULT	66
MENUITEM.....	67
MKDIR (MaKe DIRectory).....	68
MODE.....	68
MORE.....	69
MOVE.....	70
MSCDEX	71
NEWFILE.....	71
NUMLOCK	72
PATH	73
PAUSE	73
POWER.EXE.....	74
PRINT	75
PROMPT	76
REM (REMark)	77
REMQUIT.EXE.....	78
REN (REName).....	78
RESTORE	79
RMDIR (ReMove DIRectory).....	80
SET	80
SHARE.....	81
SHELL.....	81
SHIFT.....	82
SORT.....	83
STACKDEV.SYS	83
STACKS.....	84
SUBMENU	84
SUBST.....	85
SWITCHES	86
SYS	86
TIME.....	87
TREE.....	88
TYPE.....	89
UMLINK.SYS	89
VDISK.....	90
VER.....	91

VERIFY	91
VERSION.SYS.....	92
VOL	92
XCOPY	93
Appendix A, The TRANSFER Program.....	95
TRANSFER Program Examples	96
Appendix B, The COMM Program	97
Command Line Options.....	97
Environment Variables	97
COMM Commands	98
Terminal Emulation	99
File Transfer Recovery with Zmodem Protocol.....	99
Appendix C, The RSZ Program	101
RSZ Program Options.....	101
File Transfer Recovery.....	102
Time Zones.....	102
Appendix D, NED (Editor) Program.....	103
Starting the Editor	103
Basic Editor Operation	103
Remote Editing.....	104
Troubleshooting Remote NED	105
Default Hot Keys	106
Appendix E, Remote Disk Program	109
Server Program.....	109
Client Program	110
Using the Remote Disk	110
Appendix F, Keyboard Layouts	111
Keyboard Layouts	111
Denmark.....	111
Finland	111
France.....	112
Germany	112
Italy	112
Norway	113
Spain	113
Sweden	113
United Kingdom	114
United States.....	114
Index	115

Chapter 1, Introduction

ROM-DOS is a disk operating system that can be loaded in Read Only Memory (ROM) and can run entirely from within ROM and also from a hard or floppy disk, such as in a desktop system. ROM-DOS is functionally equivalent to other brands of DOS and can run programs that are executable under a standard DOS (which executes from RAM). With ROM-DOS, the executable program resides on a disk or is placed in ROM along with ROM-DOS.

Conventions Used in this Manual

This manual uses several notation conventions to denote specific actions and types of information.

- Key combinations, where two or more keys must be pressed simultaneously, are shown with a plus sign. For example, Shift+F1.
- Command line entries and displayed messages are shown in this font. For example,
`DEL MYLETTER.DOC`
- Command line entries indicated by italicized lowercase letters represent information that you supply. For example,
`DEL <filename>`
indicates a need to enter the name of the file to be deleted.
- Command line entries enclosed within square brackets represent optional information. For example,
`PAUSE [message]`
indicates the *message* portion may be omitted from the PAUSE command.
- Command line entries that include mutually-exclusive options separate those options with a vertical bar (|). In the following example, anything more than the BREAK command must be either the ON or OFF.
`BREAK [ON|OFF]`
- You must press the Enter key for ROM-DOS to accept your command line data. The command line entries shown in this manual do not show the Enter key.

Terminology Used in this Manual

Computer files are stored either in the computer's internal memory (RAM and ROM) or on magnetic media, typically disks. Regardless of where the files reside, all information is stored in bytes. A byte can store a single character of data. The following terms describe the size of memory, files, and disk space:

- **KB** (kilobyte)—One kilobyte equals 1024 bytes, although the number is often rounded to one thousand bytes.
- **MB** (megabyte)—One megabyte equals 1,048,576 bytes but is usually thought of as one million bytes.
- **GB** (gigabyte)—One gigabyte equals 1,073,741,824 bytes but usually is thought of as one billion bytes.

Random Access Memory (RAM)

RAM can be written to, read from, erased, and rewritten. RAM is your computer's electronic workspace during operation. RAM is also called volatile memory. Its storage ability is temporary, only holding information while the power is on. When the power is turned off or interrupted, everything stored in RAM is lost.

Within limits, you can change the amount of RAM in a system. Typically, embedded systems have 512KB, 640KB, or 1MB of RAM. Greater amounts of RAM are also possible. In desktop systems, 16MB to 128MB are common.

Read Only Memory (ROM)

ROM is more permanent than RAM. Data is programmed into a ROM device before the device is installed in the computer. Information stored in ROM remains intact whether the system power is on or off.

Disks and Disk Drives

Computer disks are classified into two basic groups; rotating media such as floppy disks and hard disks, and memory disks such as those formatted in RAM, ROM and flash memory.

Floppy Disks

A floppy disk is a disk-shaped piece of magnetic material much like audio recording tape. The information is stored in concentric tracks that are subdivided into sectors. Typical storage space on the 3.5-inch disk is 1.44MB.

Hard Drives

Hard drives work much like floppy disks but are fixed in the computer chassis and have a much higher storage capacity. ROM-DOS 6.22 is capable of utilizing hard drives of up to 8GB. Larger drives need to be partitioned into two or more drives.

RAM Disks

Portions of RAM can be made to behave like disk drives, complete with tree-structured directories. When a disk drive is created in RAM, it can be read from and written to in the same manner as the physical disk media. However, when system power is interrupted, all information on the drive is lost, unless the drive is formatted on static RAM.

ROM Disks

Portions of ROM can be made to behave like disk drives, complete with tree-structured directories. ROM drives differ from RAM drives in that they are written to only once. Thereafter, they can only be read from, much like a write-protected floppy disk. Also, ROM disks are non-volatile, in that the information is not lost when power is lost.

Flash Memory Disks

Both PCMCIA cards (PC cards) and on-board (resident) flash arrays can serve as disk drives when used with flash file system software such as Datalight's FlashFX for on-board flash memory. Unlike ROM disks, flash memory disks support both the reading and writing of data.

Chapter 2, Files, Directories, and Command Line Entries

Naming Files

A file is a defined set of related information that your computer stores electronically. A file may be stored on a floppy disk (also called a floppy), on a hard drive, on a CD, or may reside in computer memory (RAM or ROM). To maintain control of interaction between various computer files, each must have its own name that both you and the computer can recognize.

Filenames

Files used in the ROM-DOS environment have two-part names separated by a period. The first part is the filename; the second part is the filename extension. For example, the command interpreter file provided with ROM-DOS is named COMMAND.COM, where COMMAND is the filename and .COM is the filename extension.

Filenames range from one to eight characters in length and consist of any combination of letters, numbers, and the following symbols:

underscore	_	ampersand	&
caret	^	hyphen	-
dollar sign	\$	braces	{ }
tilde	~	parenthesis	()
exclamation point	!	at sign	@
number sign	#	apostrophe	'
percent sign	%		

Filename Extensions

The second part of the filename is the filename extension. The filename extension has one, two, or three characters and may use the same symbols as the filename. A filename extension is not required, although filename extensions can be helpful in identifying the type of file. Commonly used filename extensions include .DOC for documents, .DAT for data, and .TXT for text files.

You may use any filename extension you choose. However, certain filename extensions have a special meaning to ROM-DOS and should only be used when appropriate. These include:


- .COM—used for executable files
- .EXE—used for executable files
- .BAT—used for batch files

Some application programs, such as word processors, may use or require particular filename extensions for output or input files. It is best to follow the application instructions regarding proper filename extensions for that particular program. For example, a file named LETTER1 may include a filename extension such as LETTER1.DOC or LETTER1.TXT.

It is possible to have several files with the same filename but different extensions. ROM-DOS searches for and accesses the filename extensions in the following order: .COM, .EXE, .BAT, and then all others. For example, you could have an executable file named MYPROG.EXE and a batch file call MYPROG.BAT in the current directory. When you enter MYPROG on the command line, the file MYPROG.EXE is executed. If you want to execute the batch file MYPROG.BAT, you must specify the .BAT extension when entering MYPROG on the command line.

Tree-Structured Directory System

ROM-DOS uses a tree-structured directory system. In this system, each branch of the directory, called a subdirectory, is either attached to the main or root directory or is attached to another subdirectory. The following diagram illustrates the directory system and shows two levels of subdirectories under the root directory.

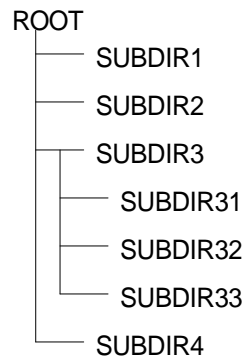

Naming Subdirectories

You can create any subdirectory structure you choose, giving each subdirectory the name of your choice. The naming of subdirectories is similar to the naming of files; there is an eight-character limit and the same character-choice limitations as for filenames (letters, numbers, and symbols). A subdirectory name can also have an extension. For more information on creating and deleting subdirectories, refer to the MKDIR and RMDIR descriptions later in this manual.

Moving around the Directory Tree

When the computer is first turned on, ROM-DOS boots into the root directory. From the root, you can change to any other directory by means of the CD (CHDIR) command. At any given time, ROM-DOS considers you to be in a specific directory, referred to as the current directory.

You can make the computer automatically move to a different directory upon system startup by adding the CD command to your AUTOEXEC.BAT file. Refer to the description of the CHDIR command on page 33 for more information on changing the current directory.

Drive Specifications

Since ROM-DOS can store and retrieve information from more than one disk drive, disk drives are given unique names such as A:, B:, C:, and so on. By convention, floppy disk drives are identified as drive A: and drive B:. On systems having only one physical floppy drive, ROM-DOS can treat the one drive as either A: or B:.

The hard drive, if your system has one, is identified as drive C:. Hard drives can be partitioned (divided) into smaller sections with the FDISK utility. Disks exceeding 8GB must be partitioned into two or more areas, with a maximum size of 8GB per partition. A separate drive letter identifies each hard-drive partition. The first partition is drive C:, the next drive D:, and so on. The highest available drive identifier is the letter Z.

To refer to the C: drive, enter on the command line

```
c:
```

Note: The drive name may be entered in either uppercase or lowercase.

Using Wildcard Characters

To simplify a task performed on a large group of similarly named files, use wildcard characters. Wildcard characters allow you to reference groups of files without entering the complete filename for each file in the group. A wildcard character can substitute all or part of a filename or extension. The two wildcard characters are the asterisk (*) and the question mark (?). The asterisk represents an entire name or a group of characters found within a name. The question mark represents a single character. The following table lists some examples of wildcard character usage.

Example	Description
DIR C:\TEST*.EXE	Lists all files in the TEST directory having the extension .EXE.
DIR D*.*	Lists all files in the current directory that start with the letter D.
COPY C:*.BAT B:*.BAK	Copies all files with a .BAT extension from the C: drive root directory onto the B: drive. The files on the B: drive will have an extension of .BAK. This example backs up a group of files with a single command.
DIR B:\????.*	Lists all the files on the B: drive that have exactly four characters in the filename but have any extension. The question mark substitutes for a single character.
REN TEST?.BAT TEST?.OLD	Renames all files having TEST for the first four characters in the filename, followed by any single character and the .BAT extension. The files retain the same TEST? filename but gain the file extension OLD.

Example	Description
	The ? can also be used to match a single specific character in a filename.

System Prompt

After the execution of each command, ROM-DOS displays the system prompt indicating that it is ready for the next instruction. Unless you define the system prompt otherwise with the PROMPT command, the prompt includes only the current disk drive designation followed by a right angle bracket. For example,

```
A:>
```

One common choice for prompt line configuration is to include the current path in addition to the drive designation. For example,

```
A:\MY_FILES>
```

For more information on configuring the system prompt, refer to the PROMPT command description on page 76.

Command Line

Your keystrokes appear to the right of the system prompt on the command line. You can use the following keys to edit the contents of the command line:

Key	Editing Function
F1	Displays one character at a time from the command line buffer. The right-pointing direction key works in the same way.
F3	Displays entire contents of command buffer.
Ins	Allows insertion of one or more characters in the command line.
Del	Allows deletion of a character from the command line buffer.
Esc	Cancels the current command line and returns you to a new, empty line.
Backspace	Deletes to the left. Allows backing up on the command line.

The last command entered on the command line is stored in a command line buffer. You can recall and edit the contents of this buffer as a way of reentering the command to repeat it or make changes to it. For example, if you intended to enter CHKDSK but accidentally entered CHKDSI, a message appears indicating that CHKDSI is a nonexistent command or filename. Rather than reentering the entire string of characters, press F3 to recall the string and use the Backspace key to back up and make the correction.

You may also make corrections to the beginning of long command line entries. For example, suppose you enter the command

```
CPY DATA1.DAT A:DATA1BAK.DAT
```

where the command is misspelled (COPY is missing the O). To correct the command line, press F1 to display the first character. Then press Ins followed by O.

You can now enter the rest of the command by pressing F3 once.

Redirecting Input and Output

Certain conventions dictate where each ROM-DOS command receives input data and where it sends output data. However, by using the right angle bracket (>) and the left angle bracket (<), you can redirect the input and output.

Input Redirection

The syntax for changing standard input source from keyboard input to file input is

< *filename*

When this is added at the end of the command line, ROM-DOS receives its instructions from the file named *filename*.

Caution: If input redirection is used and the input file is incomplete, the system will hang and refuse to accept information from the keyboard (except for Ctrl+Alt+Del to reboot).

Output Redirection

The syntax for redirecting output to a file is

> *filename*

When this is added to the end of the command line, standard output is temporarily directed to the file named *filename*. If the named file already exists, its contents are replaced with the ROM-DOS function's output. Otherwise, a new file is created to hold the output. Output can also be redirected to a device such as PRN (the printer).

To append output to the receiving file, rather than replace its contents, use >>.

>> *filename*

This adds the ROM-DOS function's output to the existing contents of the named file. If the named file does not exist, ROM-DOS creates the file.

For example, if you want to save a list of the current directory contents to a file, you can redirect the DIR command's output to a file by entering:

```
DIR > MYDIR.TXT
```

where MYDIR.TXT is the name of the file you want to contain the directory listing.

Chapter 3, Using Batch Files

A batch file is a standard text file containing a list of commands that can be submitted to ROM-DOS for automatic sequential execution. Using batch files helps you avoid unnecessary retyping of command sequences that are commonly repeated, complex, or difficult to remember.

The ROM-DOS command processor provides full batch file processing, compatible with standard DOS version 6.22. Batch files can include internal DOS commands, external DOS commands, batch file commands, names of other executable files or programs, or even the names of other batch files.

Batch Filenames

When naming batch files, use the .BAT extension on the filename. This extension tells ROM-DOS to execute the batch file when its name is entered on the command line. The name of the batch file cannot be the name of other internal commands. For example, COPY.BAT is an invalid batch filename.

To execute the batch file, enter the filename on the command line. You need not include the .BAT extension unless a file with the same filename and a .EXE or .COM extension is present in the same directory. Batch file execution begins when you press the Enter key.

Creating a Batch File

You can create a batch file by using any word processor or text editor that saves output as unformatted (ASCII) text. Or you can create them by typing directly from the keyboard into a file. This is done with the command

```
COPY CON filename.BAT
```

This tells ROM-DOS to copy the output from the console (keyboard) to the specified file. Once you have entered the above command, you may enter the contents of your batch file.

At the completion of each line, press Enter. As you enter each line, you can make corrections using Backspace and retyping. If you enter an incorrect line or wish to discontinue without saving your work, press Ctrl+C.

When you have finished entering all the lines in your batch file, press Ctrl+Z and then Enter to complete the file and return to the command line prompt.

Batch File Command Line Parameters

A batch file may use parameters placed on the command line. Insert these parameters as arguments for commands or instructions within the batch file. For example, the following batch file, named ARCHIVE, accepts a command line parameter:

```
PRINT %1
COPY %1 \ARCHIVE\*. *
DEL %1
```

Execute the ARCHIVE batch file by entering

```
ARCHIVE THISFILE.DAT
```

The %1 parameter takes on the name THISFILE.DAT, and the batch file executes the following to make a copy of THISFILE.DAT in the ARCHIVE subdirectory:

```
PRINT THISFILE.DAT
COPY THISFILE.DAT \ARCHIVE\*. *
DEL THISFILE.DAT
```

Note: %1 represents the first parameter in a batch file command. If a command has multiple parameters, they are represented by %2, %3, and so on.

Batch File Commands

In addition to the standard ROM-DOS commands, there are other commands specifically for batch files. Refer to CALL, CHOICE, ECHO, FOR, GOTO, IF, PAUSE, REM, and SHIFT in 'Chapter 5, Command Descriptions.'

For example, you may often run a program named MY_INFO1 followed by a program named MY_INFO2, both of which display a screen of information. After running each of these programs, you always clear the screen before proceeding. Your normal keystroke sequence is:

```
MY_INFO1
CLS
MY_INFO2
CLS
```

You could create a batch file named INFO containing the following commands:

```
MY_INFO1
PAUSE
CLS
MY_INFO2
PAUSE
CLS
```

After executing MY_INFO1 (by entering INFO on the command line), the system pauses. When you press a key, the batch file clears the screen and executes MY_INFO2, then pauses again. Press a key to return to the command line.

Note: You can bypass some or all of the commands in your AUTOEXEC.BAT files during system boot. Refer to 'Bypassing CONFIG.SYS and AUTOEXEC.BAT Commands' on page 16.

Chapter 4, Configuring ROM-DOS

Basic Configuration

Certain standard settings for your system's operation can be stored in a file named CONFIG.SYS. You may create or edit your own CONFIG.SYS file using a word processor or the COPY CON command. (See 'Creating a Batch File' on page 11.)

ROM-DOS offers three levels of CONFIG.SYS processing: DOS 3.31 compatible, DOS 5.0 compatible, and DOS 6.22 compatible. The level of processing available is determined when ROM-DOS is configured.

- DOS 3.31 compatible commands include BREAK, BUFFERS, COUNTRY, DEVICE, FCBS, FILES, LASTDRIVE, NEWFILE, REM, and SHELL.
- DOS 5.0 level processing includes all of the commands available with DOS 3.31 plus DOS, INSTALL, and STACKS.
- DOS 6.22 commands include those from both the DOS 3.31 and 5.0 levels, plus INCLUDE, MENUCOLOR, MENUDEFAULT, MENUITEM, NUMLOCK, SET, SUBMENU, and SWITCHES.

You must place the CONFIG.SYS file in the root directory of the drive that is used for system startup or boot. If a CONFIG.SYS file is not found, the following default values are used for the following commands:

```
BREAK = OFF
BUFFERS = 15
COUNTRY = 001
FCBS = 4
FILES = 8
NUMLOCK = ON
SHELL = COMMAND.COM /P /E:128
STACKS = 0,0
```

Example

A typical CONFIG.SYS file might look like this.

```
BREAK = ON
FILES = 15
BUFFERS = 15
DEVICE = C:\ROMDOS\UTILS\HIMEM.SYS
```

Using Multiple-User Configurations

Your CONFIG.SYS file can be used to define multiple system configurations. This is handy when several people share a computer and require different working environments. It is also useful for booting your own computer using different device drivers, paths, or settings, depending on the intended computer tasks.

To define multiple configurations within the CONFIG.SYS file, you first need to define a startup menu. Each menu item represents a different system configuration option. Then, for each item on the menu, define a configuration block. Each configuration block contains the specific commands to be implemented as the system completes booting.

The menu-item definition and all configuration blocks are marked with a block header. A block header is a descriptive label enclosed in square brackets ([]). The start of the menu items must be marked with the block header [MENU]. Each configuration block may have a unique label of your choice. This label can be up to 70 characters long and can contain most printable characters, including spaces, backslashes (\), forward slashes (/), commas (,), semicolons (;), and equal signs (=). Square brackets ([]) cannot be used in block names.

The menu block (or submenu block) may contain only the following commands (A full description for each command can be found in the Command Descriptions section in chapter 6):

- Menuitem
- Menudefault
- Menucolor
- Submenu
- Numlock

Note: Although NumLock may be used outside of a menu/submenu block, it is typically used to enable the keypad for menu-choice selections in the menu block.

A sample menu block might look as follows:

```
[MENU]
menuitem=Research, Research and Development
menuitem=WP, Word Processing
menuitem=Games, Games
menucolor=8,5
menudefault=WP, 10
```

When the system boots, the following menu displays

```
ROM-DOS 6.22 Startup Menu
1. Research and Development
2. Word Processing
3. Games
Enter a choice: 1
```

Each menu item has its own configuration block. Items that are common to all menu choices can be placed in a Configuration Block labeled [COMMON]. All instructions in the common block are carried out along with the specific instructions for any menu item. The [COMMON] block can also be placed at the end of your CONFIG.SYS file so that applications can append commands into this area as the application installs. You may have as many common blocks as you want. The instructions found in the common block(s) are processed in the order they are listed in the CONFIG.SYS file.

When the CONFIG.SYS file is processed by ROM-DOS, it first displays the startup menu that was defined in the [MENU] configuration block, and then waits for your response. The choice

made from the menu determines the configuration block whose commands are to be executed. After the menu selection, processing starts with any instructions in CONFIG.SYS prior to the menu block. Then, instructions in the selected configuration block (including instructions added in via an INCLUDE statement) and all common blocks are processed in the order they are listed in CONFIG.SYS. ROM-DOS ignores the instructions in any nonselected configuration blocks or submenus.

To continue the above example, the configuration blocks might appear as follows:

```
[COMMON]
device=c:\romdos\himem.sys
dos=high
break=on
[RESEARCH]
files=20
buffers=50
device=vdisk.sys 128 /e
[WP]
files=10
buffers=10
lastdrive=m
device=c:\network\loadnet.sys
[GAMES]
include=wp
device=mouse.sys
[COMMON]
```

If choice number 3 is made, selecting [GAMES], the instructions in the [COMMON] configuration block are processed first, followed by the instructions in the [GAMES] configuration block. The [GAMES] section makes use of the INCLUDE command. All of the instructions provided for the WP menu choice also apply to [GAMES]. If any instructions are in the final [COMMON] configuration block, they are processed last.

Extending Menu Items to AUTOEXEC.BAT

The defined name of the menu item you have chosen becomes the value of the environment variable CONFIG. For example, if you choose number 3, GAMES, from the preceding menu, the variable CONFIG is set to GAMES. The CONFIG environment variable can then be used in your AUTOEXEC.BAT file to further customize the startup sequence. This environment variable is referenced by %CONFIG% in your AUTOEXEC.BAT file.

An example of an AUTOEXEC.BAT file that continues the customization process from the preceding MENU may look like this.

```
prompt $p$g
set temp=c:\mystuff\temp
c:\virus\scanit.com
rem Go to section that matches menu
rem choice made in CONFIG.SYS
goto %config%
:RESEARCH
path c:\bin;c:\ROMDOS;c:\ROMDOS\utils;c:\BORLANDC
cd \ROMDOS
rem Skip other sections and move to end
goto end
:WP
```

```
path c:\bin;c:\ROMDOS;c:\wp
wp
rem Skip next section and move to end
goto end
:GAMES
path c:\bin;c:\ROMDOS;c:\gamedir
cd \gamedir
gamelist.bat
goto end
:end
```

Bypassing CONFIG.SYS and AUTOEXEC.BAT Commands

ROM-DOS offers the capability to bypass some or all of the commands in your AUTOEXEC.BAT and CONFIG.SYS files during the boot process. This feature may be useful in tracking system problems that may be related to one or more commands in either of these two files.

To bypass the instructions in both your AUTOEXEC.BAT and CONFIG.SYS files, follow these steps:

1. Turn on, or restart your computer if it is already on, and wait for the following message.
`Starting ROM-DOS...`
2. As the above message is being displayed, press the F5 key or hold down the SHIFT key to display the following message.
`ROM-DOS is bypassing your CONFIG.SYS and AUTOEXEC.BAT files.`

Your system then continues the boot process using the basic default configurations. You may notice differences in the way your system behaves. For instance, installable device drivers and memory device drivers are not loaded, and system prompts and path have default values. If the command interpreter COMMAND.COM is not in the root directory, ROM-DOS may not be able to locate it.

Stepping Through CONFIG.SYS and AUTOEXEC.BAT Commands

If you suspect that one or more commands in either the CONFIG.SYS or AUTOEXEC.BAT files are causing problems in your system, you can choose to process or bypass each command as follows:

1. Turn on, or restart your computer if it is already on, and wait for the following message.
`Starting ROM-DOS...`
2. As the above message is being displayed, press the F8 key to display the first command in the CONFIG.SYS file.
3. For each command, ROM-DOS displays a [Y,N]? prompt. To process the instruction, press Y. To bypass the instruction, press N. ROM-DOS then moves to the next command in the CONFIG.SYS file. To bypass the confirmation prompt for the remaining

instructions in the CONFIG.SYS file and skip the AUTOEXEC.BAT file, you can press the F5 key at any [Y,N]? prompt.

Note: You can prompt for a single CONFIG.SYS command by using the question mark (?) command prior to the equals sign (=) in the command line. For a complete description of each CONFIG.SYS command, refer to the ROM-DOS 6.22 Command Descriptions starting on page 23.

When ROM-DOS finishes all of the commands in the CONFIG.SYS file, it prompts with:

```
Process AUTOEXEC.BAT [Y, N]?
```

Press Y to selectively process the commands in AUTOEXEC.BAT, otherwise press N to bypass all commands in the AUTOEXEC.BAT file.

Environment Variables

A block of system memory is reserved for the definition of certain strings, called environment variables, to be used in the command processor environment. These include the settings you may establish with the PATH and PROMPT commands as well as COMSPEC, which is automatically defined by ROM-DOS at system startup. Environment variables may be defined using the SET command that is explained in the Command Descriptions section in chapter 6.

Configuring ROM-DOS for International Use

You can configure ROM-DOS to conform to local conventions for date, time, and currency formats by giving the COUNTRY= command. You can also use the COUNTRY command to select an international character set (known as a code page) that determines the sort order. Any code page can also be shown on EGA and VGA displays by loading DISPLAY.SYS. You can remap a keyboard to provide support for various languages and layouts by running KEYB.COM.

ROM-DOS uses a country code to identify the country conventions that are to be used. In most cases, the country code is the same as the international long distance telephone dialing code.

A code page is a set of 256 symbols, including letters, digits, punctuation, and graphic characters. The first 128 symbols in a code page are the standard ASCII characters and are identical in all code pages. The last 128 symbols vary depending on the code page. These symbols include the graphic, line-drawing characters, plus many international letters, currency symbols, and other assorted symbols. A number, such as 437 identifies each code page.

A computer display has one hardware code page built into it. Typically, this is code page 437, which is the standard US code page. CGA and monochrome monitors can only display the hardware code page in text mode. EGA and VGA monitors display the hardware code page unless you load special software (like DISPLAY.SYS). Each country supports a default code page and an alternate code page. The following table lists the valid combinations.

Country	Code	Code Page	Alternative Code Page
Australia	061	437	850
Belgium	032	850	437
Brazil	055	850	437
Canadian-French	002	863	850
Czech Republic	042	852	850
Denmark	045	850	437
Finland	358	850	437
France	033	850	437
Germany	049	850	437
Hungary	036	852	850
Italy	039	850	437
Japan	081	932	---
Latin America	003	850	437
Netherlands	031	850	437
Norway	047	850	865
Poland	048	852	850
Portugal	351	850	860
Russia	007	866	437
Spain	034	850	437
Sweden	046	437	850
Switzerland	041	850	437
United Kingdom	044	437	850
United States	001	437	850
Yugoslavia	038	852	850

Changing Country Conventions

The command to instruct ROM-DOS to use German conventions, for example, is

```
COUNTRY=049
```

The COUNTRY= command requires COUNTRY.SYS to be present in the root directory of the boot drive. Setting a country code affects

- Date and time formats
- The symbol used to denote currency

If you only specify a country code, ROM-DOS uses the default code page for that country. You can choose the alternate code page by including it in the COUNTRY= command. This command

tells ROM-DOS to use German conventions for things such as date and time but using code page 437 instead of 850, the default code page.

```
COUNTRY=049,437
```

Setting a system code page affects

- The sort order for alphabetizing
- The rules for converting international letters to uppercase.

The individual application programs determine whether they make use of these conventions. For example, DOS uses the date format for displaying directories and for showing and getting the current date and time. Some programs may choose to ignore the country information and continue to display dates in a specific format.

Displaying Different Code Pages

To display a code page other than the hardware code page, you must load DISPLAY.SYS in CONFIG.SYS. The following command sets the display to show code page 850, assuming both the DISPLAY.SYS driver and the EGA.CPI font file are located in the C:\DOS directory:

```
DEVICE=C:\DOS\DISPLAY.SYS 850 C:\DOS\EGA.CPI
```

The available font files are named EGA.CPI and EGA3.CPI. They are both used for EGA and VGA systems.

If you have an EGA or VGA system, the character fonts are immediately switched to the requested code page. Some characters may look different after you load DISPLAY.SYS because ROM-DOS uses its own font for all 256 characters. For example, your hardware font might use a square-like zero character, but ROM-DOS might use a round zero character. The differences are minor.

Printing Different Code Pages

At this time, ROM-DOS does not support printing code pages other than those stored in the printer hardware.

Changing the Keyboard Layout

To alter the keyboard layout, issue the KEYB command from within DOS. You can do this by running KEYB in AUTOEXEC.BAT or directly from a DOS prompt. Use this following command to switch to a German keyboard layout, for example:

```
KEYB GR
```

Each country has two valid code pages. If you do not specify a code page, the default code page is used. The following table lists the valid combinations.

Country	Country Identifier	Code Page	Alternate Code Page
Australia	au	437	850
Belgium	be	850	437
Brazil	br	850	437
Canadian-French	cf	863	850
Czech Republic	cz	852	850
Denmark	dk	850	865
Finland	su	850	437
France	fr	850	437
Germany	gr	850	437
Hungary	hu	852	850
Italy	it	850	437
Japan	---	932	---
Latin America	la	850	437
Netherlands	nl	850	437
Norway	no	850	865
Poland	pl	852	850
Portugal	po	850	860
Russia	ru	866	437
Spain	sp	850	437
Sweden	sv	437	850
Switzerland	sf	850	437
United Kingdom	uk	437	850
United States	us	437	850
Yugoslavia	yu	852	850

After you have loaded KEYB, your keyboard layout reflects the country you chose. You can switch back to the US keyboard layout at any time by pressing Ctrl+Alt+F1 (Alt+Left-Shift from Russian and Czech Republic keyboards). You can return to the modified keyboard layout by pressing Ctrl+Alt+F2 (Alt+Right-Shift from Russian and Czech Republic keyboards). You can also switch to a completely different layout by running KEYB again and specifying another country identifier.

Appendix F includes diagrams of the different keyboard layouts. The diagrams show native-language keyboards that tend to have different layouts from US keyboards. KEYB does its best to map the available hardware keys to the desired layout. Some symbols may not be available when using a US keyboard and a non-US layout. In the diagrams, symbols appearing in the lower right

corner of a key are activated by pressing the AltGr key along with the desired key. On keyboards without a right AltGr, pressing Ctrl+Alt represents the AltGr key.

Note: The AltGr key is not found on a standard US keyboard.

Some keys are prefix keys that don't generate any symbol by themselves but modify the following keystroke. For example, on most European keyboards, the apostrophe key (') causes the next letter to be accented. To produce an apostrophe alone, press the apostrophe key followed by the space bar. Other keys that may behave as prefixes, depending on the current keyboard layout, are the backward apostrophe (`), tilde (~), and caret (^).

Some keys represent symbols that are not available in all code pages. For example, the German keyboard can produce a capital A with a caret above it. In the default German code page (850), that symbol is represented by the code 182. However, in the alternate German code page (437) there is no such symbol. If you are using the German layout and code page 437, and you try to produce a capital A with a caret above it, you get a caret character followed by an uppercase A (^A).

Note that the keyboard code page could be set *not* to match the display code page. This can lead to confusion, as the keyboard may produce characters that appear on screen as other symbols. Continuing the above example, if you are using the German layout with keyboard code page 850, but your display code page is 437, and you produce an uppercase A with a caret above it, the screen displays a box drawing character.

Configuring Your System: an Example

To completely configure your system, you need to include commands in your CONFIG.SYS and AUTOEXEC.BAT files. The following sample files set up a computer to use German conventions; to use code page 850 for sorting, uppercase conversions, and the display; and to switch the keyboard layout to German. COUNTRY.SYS is assumed to be in the root directory of the boot drive, and DISPLAY.SYS, EGA.CPI, KEYB.COM, and KEYBOARD.SYS are assumed to be in the C:\DOS directory.

CONFIG.SYS

```
BUFFERS=20
FILES=20
COUNTRY=049
DEVICE=C:\DOS\DISPLAY.SYS 850 C:\DOS\EGA.CPI
```

AUTOEXEC.BAT

```
@ECHO OFF
PROMPT $P$G
PATH C:\DOS;C:\UTILITY
KEYB GR
```


Chapter 5, Command Descriptions

Command Summary

Following are brief descriptions of all ROM-DOS commands, including batch file commands.

Command	Description
?	CONFIG.SYS command. It directs ROM-DOS to pause for confirmation before processing a command.
@	Used to suppress the display of a single batch-file command line.
;	Identifies nonexecuting lines. The same as the REM command.
ANSISYS	A console device driver that allows you to support Ansi codes on the local screen.
ATA.SYS	A PCMCIA ATA disk device driver.
ATTRIB	Displays or modifies the attributes associated with a file.
BACKUP	Backs up a single directory tree to a floppy drive, hard disk, or network drive.
BREAK	Turns on or off the ability to stop program execution at a non-I/O point.
BUFFERS	Sets the number of internal data buffers.
CALL	Batch file command. Invokes execution of a secondary batch file.
CHDIR (also CD)	Changes the current directory (also CD).
CHKDSK	Checks the integrity of data on a disk. Displays information.
CHOICE	Allows a user to make a processing choice during the execution of a batch file.
CLS	Clears all information from the monitor's screen.
COMMAND	Starts a second DOS command processor.
COPY	Copies files from one storage location to another.
COUNTRY	Designates the country code for displays.
CTTY	Changes the default terminal interacting with ROM-DOS.
DATE	Displays the date from the system's internal calendar. Allows revision.
DEFRAG	Reorganizes fragmented disk files to optimize disk space and system performance.
DEL	Deletes specified files.
DELTREE	Deletes one or more directory trees or individual files.
DEVICE	Installs a device driver into ROM-DOS.
DEVICEHIGH	Loads a device into the upper memory area, if available.
DIR	DIRectory. Lists contents of a specified directory.
DISKCOPY	Copies the contents of one floppy disk to another of the same type.

Command	Description
DISPLAY	Displays international letters and symbols.
DOS	Installs ROM-DOS into High Memory Area (HMA).
ECHO	Batch file command. Turns on or off display of batch execution on the monitor.
EGA/EGA3.CPI:	Font data files for use with the International video display driver, DISPLAY.SYS.
EMM386	Enables expanded memory support for capable systems.
ERASE	Erases specified files (same as DEL).
EXIT	Used to exit nested running of ROM-DOS within another program.
FCBS	Specifies the number of File Control Blocks (FCBS) open at one time.
FDISK	Initializes and partitions a hard disk for DOS.
FILES	Sets the maximum number of files that can be open at one time on the system.
FIND	Works as a filter to display only lines that contain a specified string.
FOR	Batch file command. Performs one DOS command on a set of files.
FORMAT	Initializes a disk so that ROM-DOS can access files on that disk.
GOTO	Batch file command. Moves control to a specified line in the batch file.
HELP	Lists all available ROM-DOS commands along with brief descriptions.
HIMEM	Manages extended memory and the high memory area in a 286, 386, PS/2 system.
IF	Batch file command. Performs a command based on a specified condition.
INCLUDE	Allows instructions in one configuration block to be included with instructions in another configuration block.
INSTALL	Loads Terminate and Stay Resident (TSR) programs during CONFIG.SYS processing.
KEYB	Allows altering of the keyboard layout for a different language or nationality.
KEYBOARD/ KEYBRD2.SYS	Keyboard code page data files for use with the International keyboard driver, KEYB.COM.
LABEL	Creates, changes, or deletes a disk volume label.
LASTDRIVE	Sets the maximum number of drives.
LOADHIGH	Loads a program into the upper memory area, if available.
LONGDIR.EXE	Provides a directory listing of files in a single directory including files with long file names.
MCDEX	Enables the use of CD-ROM drives.
MEM	Displays the used and free memory in your system.
MENUCOLOR	Allows setting of text and background colors for the startup menu.
MENUDEFAULT	Sets the default menu-item choice and time-out value for making a selection.
MENUIITEM	Specifies an item to be placed on the startup menu display during system boot.

Command	Description
MKDIR	Creates a new subdirectory.
MODE	Modifies the operation of the printer, serial port, and active video display.
MORE	Displays a text file one screen at a time.
MOVE	Moves files and renames files and directories.
NEWFILE	Allows continuation of CONFIG.SYS processing from a new file.
NUMLOCK	Sets the NUMLOCK keyboard key to on or off when your computer starts.
PATH	Displays current command search path(s). A new path line can be specified.
PAUSE	Batch file command. Causes execution to halt until a key is pressed.
POWER	Conserves power on the system that employs an APM BIOS.
PRINT	Prints a list of files, up to ten files.
PROMPT	Resets the appearance of the system prompt line.
REM	A batch file command for identifying non-executing lines.
REMQUIT.EXE	Terminates the REMSERV program via the serial connection.
REN	Renames files.
RESTORE	Restores files previously saved with BACKUP to the hard disk.
RMDIR (also RM)	Deletes a specified subdirectory.
SET	Sets environment variables and command processor strings.
SHARE	Installs the capabilities for file sharing and file locking on your hard disk.
SHELL	Allows selections of a command interpreter other than COMMAND.COM.
SHIFT	Batch file command. Shifts replaceable parameters one position to the left.
SORT	Sorts a text file and displays the output to the standard device.
STACKDEV.SYS	Increases the number of stacks available for IRQ handlers and Int13h.
STACKS	Allows for the use of dynamic data stacks to handle interrupts.
SUBMENU	Defines a menu item that represents a secondary menu.
SUBST	Allows one drive to appear as another drive.
SWITCHES	Allows special CONFIG.SYS file options.
SYS	Transfers the hidden system files to a specified drive.
TIME	Displays current time from the system's internal clock. Also allows revision.
TREE	Displays the path of each directory on a specified drive.
TYPE	Displays the contents of a text file on the monitor.
UMBLINK.SYS	A non-protected mode program that can allow the creation of Upper Memory Blocks using existing RAM areas.
VDISK	Allows the use of memory as a simulated disk driver.
VER	Displays current version of ROM-DOS on the monitor.

Command	Description
VERIFY	Displays the current VERIFY state or sets the VERIFY state to on or off.
VERSION.SYS	Modifies the version number ROM-DOS reports.
VOL	Displays the volume label on a disk.
XCOPY	Copies multiple files and optionally subdirectories.

Command Descriptions

The following pages provide a complete description of each ROM-DOS command, including batch file commands. Each entry includes a description of the command's purpose, command entry syntax, remarks, and examples as appropriate. Each command also has a label to designate whether it is an internal or external command.

- *Internal* commands are part of the command processor program COMMAND.COM. These functions are only available while COMMAND.COM is running.
- *External* commands are stand-alone utility programs. A special notation is also made for those internal commands that are unique to CONFIG.SYS processing. These commands, labeled Internal/CONFIG.SYS, can only be used inside a CONFIG.SYS file.

For on-line help information and syntax descriptions, use the */?* option with any command. For example:

```
DIR /?
```

Note: The file COMMAND.HLP must be available in the root directory on the boot drive to access help information for internal commands.

?

Internal Command

The question mark (?) command directs ROM-DOS to pause and ask for confirmation before processing the command. Place it on a command line in the CONFIG.SYS file following the actual command.

Syntax

[command]? = *command_arguments*

Remarks

The *command* can be any of the following standard CONFIG.SYS commands.

BREAK=	BUFFERS=
DEVICE=	FCBS=
DOS=	INSTALL=

FILES= LASTDRIVE=
STACKS= SWITCHES=

command_arguments can be any of the available options defined for the command. Refer to the individual command description for complete instructions.

The question mark (?) should be placed just before the equal sign (=) in the command line.

Example

```
DEVICE?=VDISK.SYS 64 /E
```

Causes ROM-DOS to pause and ask for confirmation before installing the VDISK. If Yes (Y) is answered, the installation will continue. If No (N) is answered, the device will not be loaded and processing moves on to the next CONFIG.SYS command line.

@

Internal Command

The @ sign command prevents a single command in a batch file from being echoed to the screen as the batch file is being run. Place the @ sign in front of the command whose display is to be suppressed.

Format

```
@ [batch file command]
```

Remarks

The *batch file command* argument can be any executable line in your batch file.

Examples

```
@COPY FILE1.BAT FILE1.SAV
```

Executes the COPY instruction, but the instructions are not echoed to the screen as the batch file runs.

```
@ECHO OFF
```

The ECHO OFF command differs from the @ sign in that it causes all subsequent commands *not* to be displayed on the screen. To prevent the ECHO OFF command from displaying itself, place the @ sign in front of the command.

;

Internal Command

The semicolon (;) command has two purposes: to allow comments in a batch or CONFIG.SYS file, and to temporarily disable a command without physically deleting the command from the file. Refer also to the REM command.

Syntax

```
; [any text here]
```

Remarks

Use the (;) command to functionally remove a command from the CONFIG.SYS file without actually deleting it from the CONFIG.SYS file.

Examples

```
;C:\BIN\VDISK.SYS 64 /E
```

Prevents the VDISK command from executing until the (;) command is removed.

ANSI.SYS

Installable Device Driver

ANSI.SYS is a console device driver that allows you to support ANSI codes on the local display.

Syntax

```
Device=ANSI.SYS [options]
```

Remarks

ANSI.SYS supports standard ANSI escape sequences.

ANSI.SYS writes directly the screen when using text video mode.

Options

The /K option forces use of the extended keyboard BIOS calls which sense F11 and F12.

The /X option lets you redefine the extended keys independently.

The /S option disables the keyboard redefinition feature.

The /Tnn option indicates that the video mode *nn* is a text mode. By default, modes 0, 1, 2, 3 and 7 are text modes.

Examples

```
DEVICE=ANSI.SYS
```

This example loads ANSI.SYS with default settings.

```
DEVICE=ANSI.SYS /T54 /S
```

Load ANSI.SYS with mode 54h as a video text mode and disable keyboard redefinition.

ATA.SYS

Installable Device Driver

ATA.SYS is a PCMCIA ATA disk device driver.

Syntax

```
DEVICE = ATA.SYS [/Axxx] [/Lxxx]
```

Remarks

ATA.SYS requires an Intel 82365 or compatible controller. The PCMCIA controller card itself is always mapped to addresses 3E0h and 3E1h. These are fixed addresses and can not be changed. This driver supports only 5-volt ATA cards. Up to two drives can be supported with the driver. Use the Datalight FORMAT command to format an ATA disk, if it is not already formatted.

ATA Cards tested:

- Integral 1841PA 17MB ATA card 660KB/s write, 690KB/s read
- Toshiba TH6SS160201AA 20MB ATA card 900KB/s write, 1200KB/s read
- SanDisk SDCFB 4MB CompactFlash card 300KB/s write, 1000KB/s read
- SanDisk SDP3B 2MB ATA card 275KB/s written 1000KB/s read

Controllers tested:

- Vadem VG-465
- Intel 82365SL rev A

Options

The /Axxxx option sets the memory window that the ATA card gets mapped to for use. This is a 4KB window. The default is C000. Replace xxxx with the correct memory segment window for your installation.

The /Ixxxx options sets the I/O address where the ATA card is mapped to by the controller. The default I/O address is 240h. The memory usage for this is 16 bytes starting at the given address.

Examples

```
DEVICE = ATA.SYS
```

Load ATA.SYS with the default memory segment and I/O address settings.

```
DEVICE=ATA.SYS /AD000 /I290
```

Load ATA.SYS using memory segment address D000h and I/O address 290h

ATTRIB

External Command

The ATTRIB command either displays or modifies the attribute of a file.

Syntax

```
ATTRIB [+ | -][option][[drive:][path]][filename]
```

Remarks

The file attributes define the characteristics of a file. They determine if a file may be deleted or modified, or if it is archived. Use the ATTRIB command to manage these file attributes.

Wildcard characters may be used in the ATTRIB *filename*.

The ATTRIB command modifies file attributes if modify commands are given to ATTRIB. The modify commands are

Option	Description
+/-	Add(+) or remove(-) attribute inserted before each option.

Option	Description
A	Archive attribute
C	Clear all attributes
H	Hidden file attribute
R	Read Only attribute
S	System file attribute

If ATTRIB finds no modify commands, then it displays the files in the specified directory along with the filenames and their current attributes.

Examples

```
ATTRIB +r myfile.dat
```

Adds the Read Only attribute to the file `myfile.dat`.

```
ATTRIB -a -r *.dat
```

Removes the Read Only attribute and the Archive attribute of all files with the .DAT extension.

```
ATTRIB *.dat
```

Displays the attributes of all files with the .DAT extension.

BACKUP

External Command

The BACKUP command backs up a single directory tree to a floppy drive, hard disk, or network drive.

Syntax

```
BACKUP <srcpath> <dstdrive> [/A] [/H] [/L[:<logname>]] [/M] [/S] [/Y] [/?]
```

Remarks

The complement program, RESTORE, restores a backup set to hard disk. Backup creates one or more backup volumes in the form of DL970507.001, where the year, month, and day compose the name, and the volume number is the file extension.

The <srcpath> (source path) can be any legal DOS path, with an optional file mask, such as `D:\SOURCE*.C`.

The <dstdrive> (destination drive) can be any legal DOS drive.

Options

The A option appends the data to an existing backup file.

The /H option backs up hidden files as well as normal files.

The /L option writes a .LOG file in ASCII text form. If no log filename is specified, BACKUP creates a .LOG file in the current directory.

The /M option backs up only files that do **not** have the archive bit set. BACKUP automatically clears the archive bit for each file it backs up. Use Datalight ATTRIB to view/set the archive bit manually.

The /S option backs up the entire tree, not just the one directory.

The /Y option allows BACKUP to operate in batch files with no user input (affirmative is given for all prompts). However, if the backup set requires multiple floppies, BACKUP prompts for all floppies after the first one.

Note: BACKUP operates much faster while using any disk cache program.

Example

The following command backs up all files in the C:\DEV\ROMDOS directory, including subdirectories, to the B: drive.

```
BACKUP C:\DEV\ROMDOS B: /S
```

BREAK

Internal Command

The BREAK command expands the list of operations that can be stopped by pressing Ctrl+C or Ctrl+Break. Alternatively, returns to the default setting of a limited number of break-able operations.

Syntax

```
BREAK [ON|OFF]
```

Remarks

In the normal default condition, the BREAK switch is off. In the off mode, the stop commands, Ctrl+C and Ctrl+Break, affect activities that read from or write to the keyboard, the screen, or the printer. ROM-DOS does not look for these stop commands during any other activities.

With the BREAK switch set to ON, ROM-DOS looks for Ctrl+C and Ctrl+Break during activities such as disk reads and writes.

Examples

```
BREAK ON
```

Expands the BREAK list.

```
BREAK OFF
```

Returns to limited BREAK list.

```
BREAK
```

Displays the current BREAK setting.

BUFFERS

CONFIG.SYS Command

ROM-DOS has internal buffers to temporarily hold data read from the disk. Increasing the number of internal buffers speeds system performance.

Syntax

`BUFFERS = number`

Remarks

Each buffer used by ROM-DOS requires 512 bytes of RAM. The BUFFERS command increases or decreases the amount of RAM used by the operating system.

The minimum *number* of buffers is two, and the maximum number is 40. When the number is less than two, the number of BUFFERS is set to two. When the number is larger than 40, then BUFFERS is set to 40. The default number of buffers is calculated using a scale. The ratio is 15 to 640KB. Consequently, a system having 640KB of conventional memory will have 15 buffers. If the calculated number is less than two, then two buffers is used.

Example

```
BUFFERS = 10
```

Causes ROM-DOS to have ten buffers. These ten buffers use 5120 bytes of RAM.

CALL

Batch File, Internal Command

The CALL command invokes execution of a secondary batch file without exiting the primary batch file. When the secondary batch file is done executing, control is returned to the primary batch file.

Syntax

`CALL batchfile [batchfile arguments]`

Remarks

Parameters for the secondary batch file may also be included, if appropriate.

Examples

```
CALL BATCH2
```

Executes the batch file BATCH2.BAT.

```
CALL MYBATCH FILEX FILEZ
```

Executes the batch file MYBATCH.BAT. The arguments passed to MYBATCH.BAT are

```
%1 = FILEX
```

```
%2 = FILEZ
```

CHDIR (CHange DIRectory)

Internal Command

The CHDIR command changes the current directory.

Syntax

```
CHDIR [drive:][path]subdir
```

```
CD [drive:][path]subdir
```

Remarks

Subdir is the name of the new current subdirectory. You may use CD in place of CHDIR.

The new directory that is to become the current directory must already exist. Refer to MKDIR for information on the creation of subdirectories.

A series of two periods (..) may be used to indicate a move back to the next-higher or parent directory.

Specifying only the backslash (\) for the *subdir* argument moves you to the root directory of the current drive.

Examples


```
CHDIR \TOOLS
```

Moves you into the subdirectory named TOOLS, whose parent directory is the root of the current drive.

```
CD A:
```

Displays the current directory on drive A:. Any valid drive letter can be substituted to get the current directory on that drive.

The following examples use this directory tree structure:

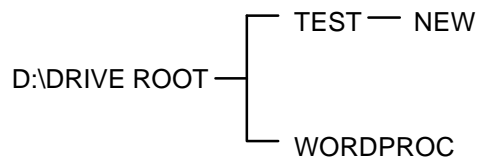

```
CD D:\TEST\NEW
```

Moves you into the subdirectory named NEW, located on the D: drive, under the parent directory TEST.

```
CHDIR ..
```

Moves you back to the parent directory of the current subdirectory. If you were in the directory D:\TEST\NEW (from the previous example), this CHDIR command moves you from NEW back into the TEST directory.

```
CD ..\WORDPROC
```

Moves you back to the parent directory and then into a subdirectory named WORDPROC. If you start in the TEST directory, you will move back to the ROOT directory and then into the WORDPROC subdirectory.

```
CD \
```

Moves you back to the root directory from any starting point in the directory tree.

CHKDSK (CHecK DiSK)

External Command

The CHKDSK command checks the disk directories and File Allocation Table (FAT) and displays a disk and memory report.

Syntax

```
CHKDSK [drive:][path][filename][/C] [/F] [/V]
```

Remarks

CHKDSK examines a disk and determines whether it has any errors in the File Allocation Table (FAT) and optionally fixes errors.

Options

The /C option allows CHKDSK to correct errors without user confirmation. This option can be used along with the /F option for corrections to be made without user confirmation.

The /F option causes CHKDSK to fix FAT or directory errors on the disk if any are found. If /F is not specified, then CHKDSK acts as if fixing the disk, but no corrections are written to the disk.

If errors are detected, you are prompted with a message similar to the following:

```
15 lost allocation units found in 5 chains.  
Convert lost chains to files?
```

If you answer Y for Yes, each lost chain is written to a file in the root directory of the current drive. Each file will have the name FILE $nnnn$.CHK. $nnnn$ will be a sequential number. The first chain will be in FILE000.CHK. These files can be verified to see if they contain valuable information, and then deleted if desired. If you answer N for No to the above prompt, CHKDSK still makes the corrections, however, the lost chains are not saved to the disk.

The /V options causes CHKDSK to display each path and file as it is processed.

If a file specification is specified, then CHKDSK displays all files matching the specification that have noncontiguous data areas on the disk. Files that are stored in noncontiguous areas, especially .EXE files, have slower disk access times. If CHKDSK reports a large number of files with this problem, you should use a utility program that optimizes the files and frees space on your disk.

After checking the disk, CHKDSK displays any error messages followed by a report on the state of the disk that was checked. An example of the report is shown below.

```
Volume ROM-DOS created June 1,1999 1:00a  
Volume Serial Number is 190E-4AA2  
362496      bytes total disk space  
0          bytes in 1 hidden files  
6144       bytes in 2 user files  
356352     bytes available on disk  
655360     bytes total memory  
595360     bytes free
```

CHKDSK does not wait for a disk to be inserted before the checking is initiated, nor does it repair any errors.

Examples

```
CHKDSK a:
```

Checks the integrity of drive A:. The report is printed to the console.

```
CHKDSK d: >drive_d.rpt
```


Checks the integrity of hard drive disk D. The report is saved in a file named DRIVE_D.RPT.

CHOICE

External Command

The CHOICE command allows a user to select between different options during the processing of a batch file.

Syntax

```
[drive:][path]CHOICE [/C[:]keys] [/N] [/S] [/T[:]c,nn] [Prompt Text]
```

Remarks

/C[:]keys specifies the allowed keys for the user prompt. The colon is optional for the command syntax. The default selection for the keys is YN. More than two key choices may be entered.

/N prevents display of the user prompt. The selected keys are still valid, but they are not displayed in the prompt message.

/S selects case-sensitivity regarding the prompt. With the */S* switch, you must enter the response in the exact case used with the */C* option.

/T[:]c,nn sets a time delay. CHOICE pauses for the specified number of seconds waiting for a response. If none is given, the default key choice is used. The argument *c* is the default-key choice character. The *nn* argument specifies the number of seconds to pause. Valid number selections are from 0 to 99. A 0 setting produces no pause.

Prompt Text for the prompt is optional. You can display different output by using the text field, or not, and by using or removing the */N* switch along with the text.

Examples

When the following CHOICE command is used

```
CHOICE /c:ync
```

you will see:

```
[Y,N,C]?
```

If the text argument is added

```
CHOICE /c:ync Please select Yes, No, or Continue
```

the display will be:

```
Please select Yes, No, or Continue [Y,N,C]?
```

If the key choice prompt is left off

```
CHOICE /n Continue reading file
```

only the following appears (note key choice of YN is default)

```
Continue reading file?
```

A complete batch file example follows. Each prompt selection returns an errorlevel that can be trapped. The errorlevel corresponds to the order of the key choice. For example, with */c:teo*, t returns 1, e returns 2, and o returns 3.

```
@echo off
cls
echo.
echo T Run TIME-IN Program
echo E Run Employee Update
echo O Run TIME-OUT Program
```

```
echo.  
choice /te /t:t,5 Please select option  
if errorlevel 3 goto timeout  
if errorlevel 2 goto update  
if errorlevel 1 goto timein  
:timeout  
tmout.exe  
goto end  
:update  
updat.exe  
goto end  
:timein  
tmin.exe  
goto end  
:end
```

CLS (CLear Screen)

Internal Command

The CLS command clears the monitor to display a blank screen.

Syntax

CLS

Remarks

CLS clears the screen, and then redisplay the DOS prompt and cursor in the upper left-hand corner. There are no additional options for CLS.

COMMAND

External Command

The COMMAND command starts a new command processor.

Syntax

COMMAND [/e: *number*] [/k *filename*] [/p] [/c *string*] [/msg]

Remarks

Use this command to start a new instance of the ROM-DOS command processor, the program that contains the internal ROM-DOS commands.

Starting a new instance of the command processor also produces a new environment. The size of the environment is 128 bytes by default but can be changed using the /e switch. The environment size may be larger if this is a secondary copy of COMMAND.

Command and its arguments can also be used in a SHELL= statement in your CONFIG.SYS file. Refer to the description of SHELL for more details.

Options

The `/e:number` switch sets the environment size. *Number* represents the size of the environment in bytes. *Number* must be in the range from 160 to 32,768. All other values are ignored and replaced with the default value of 256. ROM-DOS rounds up the value entered to the nearest multiple of 16.

The `/k` filename option tells the command processor to run the specified filename and then display the ROM-DOS command prompt. It is not recommended that this option be used in a `CONFIG.SYS SHELL=` statement.

The `/p` switch causes `COMMAND` not to exit but to remain permanent. Use the `/p` switch only when `COMMAND` is used in a `CONFIG.SYS SHELL` statement.

The `/c` string switch causes `COMMAND` to execute the command in string and then terminate. The string command can be any internal or external command.

The `/msg` option causes all error messages to be stored in memory. This option is recommended only for floppy disk-based systems. ROM-DOS keeps many of its error messages in the nonresident portion of `COMMAND.COM` rather than using valuable memory to store them. If an error message is needed, and you have loaded ROM-DOS from a floppy disk, the message will only be available if the boot disk is still in the drive. By using the `/msg` option, the message is available in memory at all times. The `/p` option must be used along with the `/msg` option.

Examples

```
COMMAND /C DIR C:
```

Causes a new copy of `COMMAND` to be executed. It performs a `DIR` command on the `C:` drive and then exits back to the previous Command Processor.

```
SHELL=C:\COMMAND.COM /P /E:256
```

Loads a permanent copy of `COMMAND` with an environment size of 256 bytes.

COPY

Internal Command

The `COPY` command copies a file or set of files to a specified destination: another disk, another subdirectory on the current disk, or on a completely different drive. `COPY` may also be used to alter the *filename* within the current directory. In addition, this command can be used to direct communication between files and devices (for example, file contents to a printer or keyboard input to a file).

Syntax

This command has several possible formats. The essential structure of each command is

```
COPY source target option
```

The *source* is the copy from *filename* or *device*, and the *target* is the copy to *filename* or *device*. Following are various configurations of the `COPY` command format.

```
COPY [drive:] [path]filename [ /option ] [drive:] [path]filename [ /option ]
```

Where the first *filename* indicates the source file(s) to be copied, and the second *filename* indicates the target area on which to copy.

```
COPY [drive:] [path]filename [ /option ] + [drive:] [path]filename [ /option ]
```

[*drive:*] [*path*] *filename* [/ *option*]

As shown, several source *filenames* may be listed to be copied into the target *filename* that is listed last. The source files are concatenated into the target file.

COPY [*drive:*] [*path*] *filename* [/ *option*] *device*

The target *device* is a console or printer (PRN).

COPY *device* [*drive:*] [*path*] *filename* [/ *option*]

The *device* is the source such as a keyboard or console, the output of which is directed to the target *filename*.

Options

The /A and /B options represent ASCII and binary, respectively, and act as switches that allow each of these file types to be copied. When /A or /B is used, it applies to the preceding *filename*. The option remains in effect for any *filenames* following in the command line until superseded by another /A or /B.

/A and /B options are only needed when combining ASCII and binary files.

/A treats the file as an ASCII file (text file). When used with the source file, everything is copied up to, but not including, the first CTRL+Z end-of-file marker. When /A is used on the target file, a Ctrl+Z is added as the last character in the file.

/B treats the file as a binary file. When /B is used with the source file, the entire file is copied regardless of any Ctrl+Z characters. When /B is used with the target filename, no Ctrl+Z end-of-file marker is added.

/H copies hidden files.

/V is not implemented in ROM-DOS for code size reasons. It is included to maintain command-line compatibility.

/Y copies the current file(s) over the existing file(s) of the same name(s) without confirmation. This option overrides the setting made by the COPYCMD environment variable.

/-Y confirms the copy of one file over the existing file of the same name. This option overrides the setting made by the COPYCMD environment variable.

Set the COPYCMD environment variable with the SET command. This allows you to set confirmation on or off for the COPY command. If you always want to be prompted for confirmation when a file will copy over an existing file, set COPYCMD= /-Y. To automatically overwrite without confirmation during a copy instruction, set COPYCMD= /Y. For proper usage, refer to the SET command.

Remarks

When no filename is specified for the target, the new copy is given the same name as the source filename.

When no *drive* or *path* is specified for the source, the current drive and directory are assumed.

When no *drive* or *path* is specified for the target, the current drive and directory are assumed.

If a drive name only is specified without a *path*, the current directory for that drive is assumed.

Both source and target *filenames* may include wildcard characters (*) and (?) to specify a set of several files.

Examples

```
COPY LETTER.TXT A:
```

Copies the file LETTER.TXT (in your current drive and path) to the current directory on the disk in drive A:

```
COPY *.DOC A:
```

Copies all files in the current directory with an extension of .DOC to the default directory of drive A:

```
COPY DATAORIG.DOC DATABACK.DOC
```

Creates a backup copy, DATABACK.DOC, from the file DATAORIG.DOC. The new file is located in the current directory.

```
COPY JAN.DAT + FEB.DAT + MAR.DAT QTR1.DAT
```

Copies the files JAN.DAT, FEB.DAT, and MAR.DAT in sequence into the single file, QTR1.DAT.

```
COPY CON NEWFILE.TXT
```

Sets up your console (keyboard) to input directly to NEWFILE.TXT. Ctrl+Z followed by Enter closes the file and returns to normal command line operation.

COUNTRY

CONFIG.SYS Command

ROM-DOS supports multiple country formats for time, date, and currency, and other basic country-specific information. A country is identified by a three-digit, international telephone country code.

Syntax

```
COUNTRY = countrynumber [codepage]
```

Remarks

The file COUNTRY.SYS must be present in the same directory as your CONFIG.SYS file.

If you do not specify a code page, ROM-DOS uses the default code page for the chosen country. If a code page is specified, it must be either the default or alternate code page for the chosen country.

This command affects the ROM-DOS DATE and TIME commands. Applications that use DOS functions to determine the date, time or currency format, or request that DOS provide character sort order or uppercase information, are affected as well.

Refer to the table provided on page 18 for a list of the currently supported countries.

Examples

```
COUNTRY= 049
COUNTRY = 049, 437
```

The next time you start ROM-DOS with either of these COUNTRY commands, the DATE and TIME will be displayed as follows:

```
DATE
Current date is Wed 20.06.1998
Enter new date (dd.mm.yyyy):
TIME
Current time is 16:39:54,45
Enter new time:
```

The first COUNTRY command above uses codes page 850, by default, for sorting and case conversion. The second COUNTRY command example uses the specified code page 437 instead.

CTTY (Change TeleTYpe)

Internal Command

The CTTY command directs input and output to a different device other than your computer's standard keyboard and monitor.

Syntax

CTTY *device*

Remarks

Use CTTY for any situation requiring interaction with an alternate console.

The CTTY command only affects communication with ROM-DOS and with programs that work through ROM-DOS for input and output. For example, BASIC uses standard keyboard input regardless of previous CTTY command usage.

Examples

```
CTTY COM2
```

Sets the device on COM2 as the input/output device.

```
CTTY CON
```

Returns control to the standard keyboard.

DATE

Internal Command

The DATE command displays the current date (day, month, year) as known to ROM-DOS and also allows you to change it.

Syntax

DATE [*mm-dd-yyyy*]

Remarks

The date set by this command is used, among other things, for date stamping your file revision dates. This information is displayed when you execute a directory listing of your files.

You may want to include the DATE command in your AUTOEXEC.BAT file, so you can set the date during boot. If your computer has an internal, battery-operated clock, you won't need to do so.

The format of the date command is also dependent on the country specified in CONFIG.SYS. The date is displayed according to local standards for the specified country.

Refer also to the TIME command.

Examples

When entering this command without specifying *mm-dd-yyyy*, the current date as known to ROM-DOS is displayed, and you are prompted to enter a new date.

```
Current date is Sat 6-10-1989
Enter new date (mm-dd-yyyy):
```

If you do not want to change the date, press Enter. Otherwise, key in the current date and press Enter.

Alternatively, you may skip the display and prompting by entering the current date on the command line. To enter June 10, 1999 (assuming US country support), enter the DATE command as follows:

```
DATE 6-10-1999
```

Valid entries for months, days, and years are

```
mm = 1-12 dd = 1-31 yyyy = 1980-2099
```

ROM-DOS calculates the day of the week; do not include it in your entry.

DEFRAG

External Command

The DEFRAG command reorganizes fragmented files on hard and floppy disks to optimize disk space and system performance.

Syntax

```
DEFRAG [drive:] [[/D | /F | /U] [/S[:]order] [/B]]
```

Remarks

To defragment files on your disk, quit all other programs prior to running DEFRAG.

Options

Option	Description
[drive:]	Drive letter of the disk to be optimized.
/B	Reboot the system when defragmentation/optimization is completed.
/D	Optimize directories only.
/U	Defragment files and optimize directories (default option).
/S	Sort files by specified order. Use a hyphen (-) suffix to reverse the order. N = by name (alphabetic) E = by extension (alphabetic) D = by date & time (earliest first) S = by size (smallest first) - = reverse previous sort order.
/C	Prevents prompting for confirmation. DEFRAG does not prompt for confirmation when run from a batch file.

Example

The first example defragments drive C, places the files in reverse alphabetical order, and reboots the system when finished. The second example defragments files on the current drive, optimizes directories and sorts in the order of increasing file size.

```
DEFRAG c: /s:n-e- /b
```

or

```
DEFRAG /u /ss
```

DEL (DELeTe)

Internal Command

The DEL command deletes a specified file or set of files.

Syntax

```
DEL [drive:] [path]filename [/P]
```

Remarks

The DEL command and the ERASE command are functionally identical.

When no drive is specified, the default is assumed. When no path is specified, the default path is assumed.

Global filename characters ? and * (wildcards) can be used in the *filename*. This should be done with caution as it is possible to delete multiple files unintentionally.

When the *filename* *.* is used to delete all files in the specified subdirectory, a verification message is displayed:

```
Are you sure (Y/N) ?
```

Enter Y to delete all files in the specified subdirectory.

DEL deletes files within a subdirectory, not the subdirectory itself. For subdirectory removal, refer to the RMDIR command.

Caution: No ROM-DOS command can undelete a file. Although utilities exist that can attempt an undelete, certain factors can cause the deleted file to be partially or totally lost. The DEL command should be treated as a permanent deletion.

Options

The /P option causes DEL to pause and prompt you before each file is deleted. This option is most useful when deleting files with wildcards. A sample prompt is shown below:

```
<Filename> Delete (Y/N) ?
```

Examples

```
DEL A:*.DOC /P
```

Deletes all files on the A: drive with a .DOC extension. Before each file is deleted, you are prompted to determine if that file should be deleted.

```
DEL MYLETTER.DOC
```

Deletes the file MYLETTER.DOC from the current default subdirectory.


```
DEL *.DOC
```

Deletes all files in the current subdirectory with a .DOC file extension.

DELTREE

External Command

The DELTREE command deletes one or more directory trees or individual files.

Syntax

```
DELTREE [/Y] [drive:]path [[drive:]path[...]]
```

Remarks

/Y prevents DELTREE from prompting before deleting.

[drive:]path indicates the name(s) of the file(s) or directory tree(s) to delete. Wildcards are allowed.

Examples

Datalight DELTREE deletes one or more directory trees. For example, to delete all files and directories in the tree C:\TEMP, enter

```
DELTREE C:\TEMP.
```

You can also use DELTREE to delete individual files, one at a time, using wildcards. For example, to delete selected files in the current directory, enter

```
DELTREE *.*.
```

DELTREE then prompts you for each file it finds, allowing you to choose whether to delete them.

Caution: Take care when using wildcards with DELTREE. DELTREE deletes all specified files and subdirectories regardless of their attributes. Multiple files and/or subdirectories may be specified.

DEVICE

CONFIG.SYS Command

The DEVICE command installs a device driver.

Syntax

```
DEVICE = [drive] [path] driver name [arguments]
```

Remarks

A device driver allows ROM-DOS to access hardware that is not common in all PCs.

The full drive path and filename of the device must be specified. The arguments are different depending on the device driver.

Example

```
DEVICE=C:\BIN\VDISK.SYS 120 /e
```

Installs the ROM-DOS RAM disk driver, VDISK.SYS, via the DEVICE command and dedicates 120KB of extended memory to the RAM disk.

DEVICEHIGH

CONFIG.SYS Command

The DEVICEHIGH command loads an installable device driver into the upper memory area, if available.

Syntax

```
DEVICEHIGH = [drive] [path] driver name [arguments]
```

Remarks

A device driver allows ROM-DOS to access hardware that is not common in all PCs. A device can be loaded into the upper memory areas if they are available and there is enough free upper memory to accommodate the driver's needs. To make high memory available, the EMM386.EXE and HIMEM.SYS utilities must be loaded. If these utilities are not loaded or there is not enough upper memory available, the device is loaded into conventional memory.

The full drive path and filename of the device must be specified. The arguments differ depending on the device driver.

Example

```
DEVICEHIGH=C:\BIN\MYDEVICE.SYS /20 /M
```

Installs a driver MYDEVICE with its command line arguments as specified. The device is loaded into upper memory, if available.

DIR (DIRectory)

Internal Command

The DIR command displays a list of the files that are in a specific directory.

Syntax

```
DIR [drive:] [path] [filename] [/option]
```

Remarks

Use the DIR command to list all the files in a directory or to show the directory entries of specific files. The standard directory display format includes columns for filenames, filename extensions, file sizes, and the dates and times the files were created.

Options

The /A option causes the DIR command to display only the files that match the specified *filename* and have the given attribute. The following list shows the legal attribute descriptions.

Attribute	Description
A	Archive-ready for archiving
D	Directories
H	Hidden files
R	Read only files
S	System files
X	Show attributes
-	The minus sign can be used to negate listed attributes. For example, to select all files that do not have the archive bit set, use /A-A option.

The /B or bare option causes the filenames to be displayed without volume label, date, time, or size information.

The /L option causes the filenames to be displayed in lowercase.

The /P option selects page mode, which makes ROM-DOS pause the display each time the screen is full. Press any key to go onto the next page of entries.

The /O option causes the filenames to be displayed in sorted order. The sort order can contain one or more of the following attributes.

Attribute	Description
D	By date and time, newest first
E	Alphabetic order by extension
G	Directories grouped before files
N	Alphabetic order by name
S	Size smallest first
-	The minus sign can precede the sort option to reverse the sort order. For example, to sort all files in the directory in reverse alphabetic order, use /O-N option.

The /S option causes the display to include files in subdirectories also.

The /W option displays the list in a wide format without date, time, or size.

The DIRCMD environment variable can be used to set the default preferences for the DIR command. The SET command assigns the values to an environment variable. Refer to the SET command for proper usage. For example, to always have the /P option set for DIR, use the statement SET DIRCMD=/P. You can override the default settings in DIRCMD by using the minus sign (-) preceding the option. To cancel the paging for a single use of the DIR command, enter DIR /-P.

The DIRSIZE environment variable is useful for nonstandard screen sizes. As with the DIRCMD variable, the SET command assigns the values. The syntax is

```
SET DIRSIZE rows[,columns]
```

The values for *rows* and *columns* only have an affect when you use the /P or /W options with the DIR command. The /P (paging) option uses *rows* to display the correct number of lines before

pausing. The /W (wide display) uses the *columns* argument to display the correct number of columns across the width of the screen.

Examples

```
DIR
```

Lists the directory entries of all files in the current drive and directory.

```
DIR B:\MEMOS
```

Lists all files in the subdirectory MEMOS on drive B:.

```
DIR A:* .RPT/P
```

Lists the directory entries for all files in drive A: with the extension RPT, displayed one screen at a time.

```
DIR /ON
```

Lists all files sorted by filename order.

```
DIR /AH
```

Lists all hidden files.

```
DIR *.DOC /B
```

Lists all files with a .DOC extension without file sizes or volume labels.

DISKCOPY

External Command

The DISKCOPY command copies the entire contents of one floppy disk to another.

Syntax

```
DISKCOPY <drive1:> <drive2:> [/option]
```

Remarks

The first drive specifies the source disk, and the second drive specifies the target disk.

The disks that may be copied are 360KB, 720KB, 1.2MB, and 1.44MB disks. Both the source disk and the target disk must be of the same type. If the target disk is not formatted, or is formatted with another format, then it is reformatted before copying.

If any problem occurs during the copy process, DISKCOPY indicates the side, track, and sector where the problem occurred.

The source or the target disk may not be a RAM or virtual disk.

DISKCOPY copies only floppy disks, not hard disks.

Options

The /V option verifies the copy after completion.

Examples

```
DISKCOPY A: B:
```

Duplicates the contents of the disk in drive A: onto drive B:. Drive B: must support the same type of disk as drive A:.

```
DISKCOPY A: A:
```

Duplicates the contents of the disk in drive A:. You are prompted for swapping the source and target disk as needed to perform the entire copy.

DISPLAY

Installable Device Driver

DISPLAY is a device driver that allows you to view international letters and symbols (code pages) on EGA and VGA displays.

Syntax

```
device =[drive:][path]DISPLAY.SYS codepage[fontfilename]
```

Remarks

DISPLAY immediately reconfigures your video adapter to display characters from the selected code page instead of those characters built into the hardware.

The *codepage* argument specifies the code page you wish to display. ROM-DOS supports code pages 437, 850, 852, 860, 863, 865, and 866.

The *fontfilename* argument, when included, tells ROM-DOS where to find the EGA.CPI or EGA3.CPI font file. EGA.CPI is the default file choice. If EGA.CPI is in the same directory as CONFIG.SYS, this can be omitted.

Currently, font information for all countries other than Russia and Czechoslovakia can be found in EGA.CPI. Russia's and Czechoslovakia's information is contained in EGA3.CPI.

For more information on DISPLAY, see the section on 'Configuring ROM-DOS for International Use' on page 17.

Examples

```
device=DISPLAY.SYS 850  
device=C:\DOS\DISPLAY.SYS 850 C:\DOS\EGA.CPI
```

These examples configure the video adapter to display code page 850. The second example is used if the DISPLAY.SYS and EGA.CPI files are in the C:\DOS directory instead of the same directory as CONFIG.SYS.

DOS

CONFIG.SYS Command

ROM-DOS can be loaded into an upper portion of memory referred to as the High Memory Area (HMA), freeing more of conventional (lower 640KB) DOS memory for use by applications.

Syntax

```
DOS=HIGH
```

Remarks

The DOS=HIGH command frees up more of the standard DOS memory for use by applications.

This command only works on 286 and higher CPUs with extended memory and Datalight's HIMEM.SYS High Memory Manager, or equivalent, installed. It will not work on standard XT class PCs. Setting DOS=HIGH is ignored when ROM-DOS is in ROM.

Refer also to the HIMEM device driver description on page 58.

Example

```
DEVICE=HIMEM.SYS
DOS=HIGH
```

Loads the high memory area device driver and then loads ROM-DOS into the HMA for increased conventional memory. The high-memory-area device driver must be loaded first, before DOS=HIGH.

ECHO

Batch File, Internal Command

The ECHO command controls whether ROM-DOS commands and other messages are displayed during batch file execution. ECHO also allows you to create your own messages for display.

Syntax

```
ECHO [ON|OFF]
```

```
ECHO message
```

Remarks

The ON option is the default ECHO setting. It causes commands in a batch file to be displayed as ROM-DOS executes them. Typing ECHO OFF turns off such display, after which the ON option switches it back on again.

The ECHO command alone, entered without the ON or OFF option, displays the current ECHO setting.

The *message* option is a string of characters, such as a warning or a reminder, that you want ROM-DOS to display. Although your message displays whether ECHO is on or off, the message display is useful only when ECHO is off.

To create a message, enter ECHO followed by your message. If your message is more than one line long, the ECHO command must begin each line of the message.

The @ symbol can be used to suppress the echoing of a single command when ECHO is on. Place the @ symbol first on the command line. Refer also to the description of the @ command for additional information.

Examples

```
ECHO This batch file moves files
ECHO to another directory.
```

A batch file message with more than one line.

```
ECHO OFF
```

Sets the ECHO to off.

EGA.CPI/EGA3.CPI

Support Files

EGA.CPI and EGA3.CPI are font data files for use with the International video display driver, DISPLAY.SYS. These files contain alternate font sets to display in place of the hardware code page built into the EGA or VGA display monitor.

Syntax

Refer to the instructions for DISPLAY.SYS for usage.

Remarks

Currently, font information for all countries other than Russia and the Czechoslovakia can be found in the file EGA.CPI. Russia's and Czechoslovakia's information is contained in EGA3.CPI.

EMM386

Installable Device Driver

The EMM386 device driver enables expanded memory support for systems capable of supporting expanded memory such as the 386 and higher CPUs. HIMEM.SYS, or another extended memory specifications (XMS) manager, must be installed prior to EMM386.

Syntax (in CONFIG.SYS)

device=[drive:] [path] HIMEM.SYS

device=[drive:] [path] EMM386.EXE {I=xxxx-yyyy} {X=xxxx-yyyy} [FRAME=seg[,memK]]
[ROM=xxxx-yyyy] [D=xxx]

xxxx and yyyy define a range of memory. I= includes UMBs (Upper Memory Blocks) in that range. X= excludes UMBs in that range. ROM= creates ROM shadowing in that range.

Remarks

The HIMEM.SYS driver must be loaded for the EMM386 utility to function properly. Datalight's EMM386 supports Expanded Memory Services (EMS), Upper Memory Blocks (UMB), Virtual DMA Services (VDS), Virtual Control Program Interface (VCPI), and ROM shadowing.

MS-DOS checks for the presence of an XMS UMB provider after it loads any device. If such a device is found, it allocates all available UMBs, builds MCB chains within them, and records the fact that an upper memory chain is available in its SDA. However, ROM-DOS does not function in this manner. The Datalight EMM386 driver builds its own MCB chains within its allocated UMBs and sets up the previously-mentioned data structures with the help of the DOS kernel. Consequently, XMS UMBs that are made available by programs such as MS-DS\OS' EMM386.EXE are not recognized by ROM-DOS.

The I=xxxx-yyyy option tells EMM386 to include UMBs in the range specified by xxxx-yyyy. The X= xxxx-yyyy option tells EMM386 to exclude or **not** to make UMBs in a specified range. EMM386, by default, attempts to make UMBs in the range from C800-F800, excluding areas already occupied by ROM or RAM. Up to eight ranges can be specified. The range can be

specified as an exact range, for example, D000 to DFFF or as the starting and ending marks for the range D000 to E000.

The *FRAME=* option defines the starting segment for four 16K pages that can be mapped in and out at will. The optional *memK* argument specifies how much memory to reserve for EMS. The default behavior is to allow all XMS memory to be used as EMS but also to share it, if not in use, with other processes such as Windows or Datalight's WinLight. The EMS memory is simulated using extended memory. The segment must be on an even 16K boundary. For example,

```
DEVICE = EMM386.EXE FRAME=E000,512
```

The above CONFIG.SYS statement allocates 512KB of extended memory to be used as EMS memory, with four Windows into that memory at E000:0. By default, EMM386 uses memory as requested for EMS up to the maximum in the system.

The *ROM=* option specifies a region of ROM to be supported by shadow RAM. This can speed up system performance if the BIOS resides in ROM and does not do its own ROM shadowing. As with all memory ranges, the range must begin and end on 4KB boundaries.

The *D=* option specifies the amount of RAM in kilobytes (specified as a base-10 number) that is to be reserved for a VDS buffer. The default value is zero. Values for the *D=* option must be between 16KB and 256KB and are rounded up to the nearest 4KB.

The *MAX=memk* option specifies the maximum amount of EMS memory in KB.

The *LOW* argument prevents the relocation of EMM386 into the first UMB with sufficient size to hold it. EMM386 remains in conventional memory, using approximately 20KB, but reserving UMB areas for use by other drivers.

The *PS2* argument forces EMM386 to use the PS2-style (port92h) A20 line control.

The *RAM* argument is included for compatibility and has no effect on the function or setup for EMM386.

Datalight EMM386 contains auto detection of BIOS extensions. EMM386 automatically searches for UMBs in the range of C800-F800, similar to MS EMM386. It supports VCPI, VDS, and all Int 67H functions, shared XMS/EMS, and works with both Datalight WinLight and MS Windows. Datalight's EMM386.EXE is significantly smaller than other extended memory managers.

Datalight's EMM386 does not support reallocation of EMS pages. Only four map-able pages are supported. EMS handle 0 is not supported. LIM 3.2 contexts obtained through Int 67h function 47h share eight storage slots with EMS handle names.

Examples

```
DEVICE = EMM386.EXE I=C800-F000
```

Maps RAM from extended memory into the address C800:0 to just under F000:0 and defines an Upper Memory Block region there. The range could also have been specified as C800-EFFF.

When no *FRAME=* option is supplied, neither EMS nor VCPI services are provided by EMM386.

```
DEVICE = EMM386.EXE I=C800-D7FF I=F000-F7FF FRAME=E000, 1024
```

Maps in RAM from extended memory into C800-D7FF and into F000-F7FF and define Upper Memory Block Regions there. Also, EMS support is allowed with four 16KB pages starting at E000:0 with 1024KB (1MG) worth of 16KB pages.

```
DEVICE = EMM386.EXE ROM=F000-FFFF
```

Specifies an address range for EMM386 to use for shadow RAM. The ROM represented by the address range is copied into RAM. The RAM area is remapped into the ROM address space and write protected. In this example, the BIOS that normally occupies the 64KB block at F000:0h is copied into RAM and run from there. This may speed up your system if it does not already make use of shadow RAM.


```
DEVICE = EMM386.EXE D=20
```

Sets aside 20KB of memory for Direct Memory Access (DMA). Another client, such as a network TSR, can then utilize this memory buffer for disk I/O.

ERASE

Internal Command

The ERASE command deletes a specified file or set of files.

Syntax

```
ERASE [ drive: ] [ path ] filename [/P]
```

Remarks

The DEL command and the ERASE command are functionally identical.

When no drive is specified, the default drive is assumed. When no path is specified, the default path is assumed.

Global filename characters ? and * can be used in the *filename*. This should be done with caution as it is possible to delete multiple files unintentionally.

When the *filename* *.* is used to delete all files in the specified subdirectory, a verification message is displayed.

```
Are you sure (Y/N) ?
```

Enter Y to erase (delete) all the files in the specified subdirectory.

Caution: ROM-DOS has no command to unerase a file. Although utilities exist that can attempt an unerase, certain factors can cause the erased file to be partially or totally lost. The ERASE command should be treated as a permanent erase.

ERASE deletes files within a subdirectory, not the subdirectory itself. For subdirectory removal, refer to the RMDIR command.

Options

The /P option causes ERASE to pause and prompt before each file is deleted. This option is most useful when deleting files with wildcards. A sample prompt is shown below.

```
Filename, Erase (Y/N) ?
```

Examples

```
ERASE MYLETTER.DOC
```

Erases the file MYLETTER.DOC from the current default subdirectory.

```
ERASE *.DOC
```

Erases all files in the current subdirectory with a .DOC file extension.

```
ERASE A:*.DOC /P
```

Erases all files on the A: drive with a .DOC extension. Before each file is erased, you are prompted to determine whether that file should be erased.

EXIT

Internal Command

The EXIT command exits a secondary nested ROM-DOS operation and returns control of the system to the primary program.

Syntax

EXIT

Remarks

The EXIT command has no affect if a secondary COMMAND.COM command processor has not been loaded since the primary COMMAND.COM is always loaded in a permanent mode. A secondary COMMAND.COM is affected if it is loaded without the /P permanent option.

FCBS

CONFIG.SYS Command

The FCBS command allows you to specify the number of File Control Blocks (FCBs) open at one time.

Syntax

FCBS = number [, *minimum number*]

Remarks

Number specifies the maximum number of FCBs open at any given time. The default for this value is 4. The value for *number* must be in the range from 1 to 255. The *minimum number* specifies the minimum number of FCBs to be open at all times. The *minimum number* argument has the same default and range value as the *number* argument.

Example

```
FCBS = 8, 4
```

Sets the maximum number of FCBs to 8 and leaves at least 4 open at all times.

FDISK

External Command

The FDISK command initializes a hard disk for ROM-DOS to use. FDISK allows you to specify the number of logical drives that are available using a single or multiple physical hard disks. FDISK can be run from its menu or by command line arguments. FDISK supports drives that require LBA support.

Syntax

FDISK [*drive:*] [*options*]

Options

The *drive* option specifies the BIOS drive number to use with other command line arguments. For hard drives, this number is 80h, 81h, and so on, depending on the number of hard drives and partitions in the system.

The /B option creates a FAT16 partition and forces the update of the master boot record code.

The /C option causes FDISK to proceed without confirmation messages.

The /I# argument creates a Super-boot partition with an identification (ID) number of #. 98h is the default value for #.

The /N option prevents writing of the master boot record code for the Super-boot partitions.

The /R option refreshes the master boot record code only

The /S# option sets the partition size in MB. The default setting creates a partition as large as possible.

The /V argument displays the current partition information then exits.

Remarks

The FDISK command, when entered with no command line arguments, prompts with the command menu:

```
V) View partition(s)
R) Raw display of partition sectors
C) Create DOS partition(s)
P) Create Super-boot partition
D) Delete a partition
A) Delete all partitions
T) Toggle boot status
M) Write Master Boot Code
Q) Quit without saving
S) Save changes (and reboot)
```

Enter the letter that corresponds to your choice. If you make a mistake, press Esc to return to the previous menu.

Initialization of a hard disk is usually performed when it is first setup for use. Do this by using choice C (or possibly N). Choice C displays a description of available disk space and a recommendation for using that available space. Follow these recommendations to initialize a hard disk with as many 2GB partitions as possible.

If choice C indicates that the hard disk has partitions already, then they may be deleted if needed. The only reason for deleting partitions is to build smaller-sized partitions or fewer larger-sized partitions.

The M choice writes the code for the master boot record. By default, FDISK only writes the disk partition information. If FDISK finds that the Boot Code is invalid, it automatically writes the boot record. If the existing Boot Code appears valid, it is not rewritten unless you select the M option.

After completing all desired modifications and/or additions, select S to save changes. Once FDISK has modified the disk, the following message appears.

```
Press any key and ROM-DOS will reboot
```

After rebooting, each newly initialized drive must be formatted prior to use. Format only those drives that are new or have been resized. Formatting destroys any existing data.

If no changes were made with FDISK, or you wish to abandon the changes made, select Q to quit.

Examples

```
FDISK 81 /R /C
```

Refreshes the master boot record code on drive 81h without confirmation.

```
FDISK 80 /I98 /S5 /C
```

Creates a 5MB Super-boot partition with an ID of 98h and without confirmation.

```
FDISK 80 /S
```

Creates a partition that is as large as possible.

FILES

CONFIG.SYS Command

The FILES command specifies the maximum number of files that may be open at one time.

Syntax

```
FILES = number
```

Remarks

The number of files includes the standard files, *stdin*, *stdout*, *stderr*, *stdprn*, and *stdaux*. The minimum value is 8, and the maximum is 255. All other values are ignored.

Example

```
FILES = 10
```

Specifies the maximum number of open files to ten.

FIND

External Command

The FIND command displays lines, within a disk file, that contain a specified string of characters.

Syntax

```
FIND [ /option ] string [filename ]
```

Options

The /C option displays only the count of lines found with the specified *string*.

The /N option displays the line number of the line found containing the *string*.

The /V option displays the lines that do not contain the string.

The *string* argument specifies the string of characters to search for.

The *filename* argument specifies the file or group of files to search in. The complete drive and path can be specified. Wildcard characters can be used in the *filename*.

Examples

```
FIND printf junk.c
```

Displays each line in the file JUNK.C that contains the *string* printf.

```
dir | FIND DIR
```

Displays each line in a directory listing that contains a DIR. The command first executes a DOS DIR command with the output piped into the FIND command. The FIND command then displays each line that contains the DIR *string*.

```
FIND /C ROM-DOS MANUAL.TXT
.....MANUAL.TXT: 105
```

Displays a count of the lines in the file MANUAL.TXT that contain the string ROM-DOS.

FOR

Batch File Command

The FOR command allows repeated execution of a ROM-DOS command applied to a set of files.

Syntax

```
FOR %%variable IN (set) DO command %%variable
```

Remarks

During execution, this command attaches the *variable* as an identifier to each file in the *set* of files described; it then applies the *command* to each of these identified files. The *set* may be an exact list of complete filenames or a global file specification using wildcard characters.

The FOR subcommand can be used directly on the command line and within a batch file. To use on the command line, substitute a single percent (%) symbol for the double percent signs (%%).

Examples

```
FOR %%N IN (Q1.TXT Q2.TXT) DO PRINT %%N
```

Prints only the files Q1.TXT and Q2.TXT.

```
FOR %%N IN (*.TXT) DO PRINT %%N
```

Prints all files in the current default directory with a .TXT extension.

FORMAT

External Command

The FORMAT command initializes a disk so ROM-DOS can access files on that disk. A disk must be formatted before ROM-DOS can use it.

Syntax

```
FORMAT [drive:] [/options]
```

Remarks

FORMAT initializes the disk and directory of the specified drive. The size of the formatted disk is the largest possible size that the specified drive supports, unless a different size is specified via a command line option.

Options

The `/4` switch causes the floppy disk to be formatted as a 360KB disk even if the drive is a 1.44MB, 2.88MB, or 1.2MB drive.

The `/7` switch causes the floppy disk to be formatted as a 720KB disk even if the drive is a 1.44MB or 2.88MB drive.

The `/B` option causes FORMAT to use BIOS Int 13h calls. By default, FORMAT checks the DOS version, and if it is DOS 5.0 or higher, it uses the floppy device driver to do the format. Using the `/B` option forces FORMAT to bypass the floppy or hard disk controller and use BIOS calls. `/B` makes FORMAT device independent.

The `/C` switch causes FORMAT to format one disk without operator input. The disk is assumed to be in the specified drive, and FORMAT exits immediately when the format is complete. This switch is useful in batch files or programs that require a formatted disk without user input.

The `/F:size` option specifies the size of the floppy disk to be formatted. Available size values are 360, 720, 1.2, 1.44, and 2.88, and are entered as `/F:size`. For example, `/F:1.2`.

The `/H` switch causes the system files not to be hidden or write-protected. This can be used along with the `/S` option.

The `/I` option forces FORMAT to use IOCTL calls and never use BIOS calls. Normally, FORMAT first tries to access the device driver IOCTL calls to format the disk. If this fails, BIOS calls are used (unless the `/B` option is specified). BIOS calls are always used for DOS 3.3 and earlier.

The `/Q` option causes FORMAT to do a quick format. A quick format reinitializes the disk, deleting each file and subdirectory from the disk. A quick format can only be performed on a previously fully formatted disk.

The `/S` switch causes FORMAT to copy the ROM-DOS system files, ROM-DOS.SYS and COMMAND.COM, onto the disk. The file ROM-DOS.SYS is renamed and stored on the disk as files IBMBIO.COM and IBMDOS.COM, which are stored as hidden files, unless the `/H` option is used.

The `/V:LABEL` switch causes FORMAT to place a volume label on the disk. If the volume label is not provided on the command line, you are prompted for the volume label once the format is complete.

The `/[` switch causes FORMAT to run without display of the sign-on message.

If FORMAT encounters an error, the exit code returned to DOS indicates the type of error. The error codes are listed in the following table.

Error Level	Type of Error
0	No error encountered
1	Invalid drive
2	Unsupported drive format
3	Attempted hard drive format (unsupported)
4	Write-protect error

GOTO

Batch File, Internal Command

The GOTO subcommand transfers control to another line of the batch file.

Syntax

GOTO *label*

Remarks

The *label* is another line in the batch file consisting of a string up to eight characters long. The label may be an environment variable.

If the specified *label* is not found, then the batch file terminates with the error message
Label not found.

Example

```
GOTO MESSAGE
```

This command moves the control of execution within the batch file to a line that says
:MESSAGE

Note: A batch file label must be preceded by a colon (:).

HELP

Internal Command

The HELP command provides on-line help of each ROM-DOS command.

Syntax

HELP <command>

Remarks

The COMMAND.HLP file must be available (i.e., in the path) to use this command. If it is not available, an error message occurs, indicating that COMMAND.HLP cannot be found.

HELP serves as a memory aid. For complete information about ROM-DOS commands, always consult this manual.

HELP for each command can also be displayed by entering a /? following the command name.

All available batch file commands are also listed by HELP.

Examples

```
HELP DIR  
DIR /?
```

Both commands list the help of the DIR command.

HIMEM

Installable Device Driver

The HIMEM.SYS device driver manages extended memory and the High Memory Area (HMA) in a 286, 386 or greater, or PS/2 systems. HIMEM prevents programs from simultaneously using the same area of memory for two different purposes. HIMEM supports the Extended Memory Specification (XMS) 2.0. HIMEM is installed as a device driver in CONFIG.SYS.

Syntax

```
DEVICE = [d:] [path] HIMEM.SYS [/machine:n] [/A20[+]] [/PS2] [/CONTROLA20:OFF]
```

Remarks

The HIMEM driver can be used to allow ROM-DOS to run in High Memory.

HIMEM supports a default of 32 handles.

HIMEM should not be used with older versions of Datalight's VDISK. Current versions of VDISK use XMS memory if it is available.

HIMEM recognizes PS/2-style A20 line control and determines whether to use the PS/2 A20 control or the AT A20 control method automatically by calling Int 15h, function C0h (get system configuration). This automatic detection can be overridden with the /Machine:n, /A20, A20+, or /PS2 command line switches in the event that the auto detection on a given system fails.

/Machine:1 and /A20 both designate the PC AT A20 control method. These switches instruct HIMEM *not* to wait for the A20 line to settle.

/Machine:2 and /PS2 both designate the PS/2 control method.

/A20+ is similar to /A20 but instructs HIMEM to wait for the A20 line to settle.

/Machine:3 designates support for the Phoenix Cascade BIOS A20 control methods.

Alternately, /CONTROLA20:OFF instructs HIMEM to *not* detect the control method for the A20 line and assumes the A20 line is always on.

The /BIOS switch forces the use of BIOS Int15h, Function 87h, for data transfers to and from XMS memory.

The /QUIET switch forces HIMEM to remove the sign-on message when loading.

Error Conditions

No Extended Memory—An extended memory error condition can occur if the BIOS (via Int 15H, function 88H) notifies HIMEM that there is no extended memory. In this situation, HIMEM displays an appropriate error message and does not install.

Failure to Control the A20 Line—When HIMEM installs, it attempts to control the A20 line, which controls access to the HMA. HIMEM first attempts control via the AT method (using the 8259 keyboard control). If that fails, HIMEM then attempts control via the PS/2 method (using I/O port 60H). If both methods fail, HIMEM assumes it can't control the A20 line and displays the message

```
A20 Control (OFF)
```

If either of these errors occur, try using the /A20, /A20+, or /PS2 in the HIMEM command line.

Note also that some older programs assume that the machine is a 1MB 8086 and so require that the A20 line to be disabled (OFF) while they run. Current programs typically do not require that the A20 line be disabled.

Examples

```
Device = HIMEM.SYS
```

Installs the XMS device driver. Once this driver is installed, accessing the HMA and Extended Memory (XMS) memory areas are legal. The Extended Memory area can contain up to 2GB of memory. Typical systems have 4, 8, or 16MB of XMS memory installed.

```
Device = HIMEM.SYS /machine:1
```

Forces the use of the AT-style A20 line control.

The HIMEM driver fails to load when either the machine does not have memory above the 1MB boundary or the BIOS does not provide support for it. It also fails to load when another XMS manager has been previously installed.

IF

Batch File Command

The IF subcommand allows conditional execution of commands.

Syntax

```
IF [NOT] condition command
```

Remarks

The *condition* may be any one of the following:

```
ERRORLEVEL number
```

```
string1 == string2
```

```
EXIST [ drive: ] [ path ] filename
```

If the *condition* is true, then the *command* is executed. Otherwise the *command* is bypassed, and the next command in the batch file is executed. The [NOT] option tests the opposite of any condition.

The ERRORLEVEL *number* is true if the last program to execute had an exit code equal or greater than *number*. Using the [NOT] option with this condition tests if the exit code is less than the *number* argument.

The condition *string1* == *string2* is only true when *string1* and *string2* are identical. The strings must match exactly; uppercase/lowercase mismatches are not allowed. Applying the [NOT] option creates a condition that is true only when the strings are not identical.

The EXIST *condition* is true if the specified *filename* is found. Wildcard characters are allowed in the *filename*. The [NOT] EXIST condition is true when the *filename* cannot be found.

Examples

```
IF ERRORLEVEL 15 GOTO EXIT
```

Will GOTO the :EXIT label if the ERRORLEVEL was equal to or greater than 15.

```
IF %1 == CONFIG.SYS PRINT %1
```

Prints the file stored as the %1 parameter only if its exact name is CONFIG.SYS.

```
IF NOT EXIST OLD COPY CONFIG.SYS OLD
```

Copies CONFIG.SYS to OLD if a file named OLD does not exist.

INCLUDE

CONFIG.SYS Command

The INCLUDE command includes the contents of one configuration block into another. The instructions from the originating instruction block, as well as the included block, are carried out. This command can only be used within a CONFIG.SYS configuration block.

```
INCLUDE = blockname
```

Remarks

This command is useful for sets of instructions common to several system configurations. The commands are defined once in a single configuration block and then inserted into other configuration blocks via the INSERT command. For additional details, refer to the section 'Using Multiple-User Configurations' on page 13.

Example

```
:  
:  
[MISC]  
device=mouse.sys  
device=c:\netword\loadnet.sys  
  
[WORDPROC]  
files=20  
buffers=10  
set path=c:\bin;c:\wp;c:\dict  
INCLUDE=MISC  
.  
.  
.
```

When you choose WORDPROC from a CONFIG.SYS menu, the instructions in the configuration block labeled [WORDPROC] are carried out. The instructions in the INCLUDED block labeled [MISC] are also implemented as part of the [WORDPROC] block of instructions.

INSTALL

CONFIG.SYS Command

The INSTALL command loads Terminate and Stay Resident (TSR) programs during CONFIG.SYS processing.

Syntax

```
INSTALL = [d:\][path] TSR_Program TSR_Arguments
```

Remarks

The TSR program is loaded the same as if loaded from AUTOEXEC.BAT, except that an environment is not created. The lack of an environment may cause some programs to execute incorrectly. These programs must be loaded from the AUTOEXEC.BAT file.

Example

```
INSTALL = C:\BIN\MOUSE.COM
```

Loads a mouse driver from CONFIG.SYS using INSTALL. Command line arguments can be included.

KEYB

External Command

The KEYB command allows you to alter the keyboard layout for a different language or nationality.

Syntax

```
KEYB
```

```
KEYB countryid
```

```
KEYB countryid, [codepage] [keyboard filename]
```

Remarks

KEYB is a terminate and stay resident program (TSR). Running KEYB with no arguments shows the current settings of a resident copy of KEYB, if there is one.

The *countryid* argument is a two-letter code that specifies which country, region, or language is to become current.

When no *codepage* is included, KEYB uses the default code page for the *countryid*. You can specify either the default or the alternate code page for any *countryid*.

The *keyboard filename* argument tells KEYB where to find its data file (KEYBOARD.SYS or KEYBRD2.SYS). When no *keyboard filename* is given, KEYB first looks for KEYBOARD.SYS in the current directory, then in the directory containing KEYB.COM.

Currently, keyboard data for all countries except Russia and Czechoslovakia are found in KEYBOARD.SYS. The file KEYBRD2.SYS contains the data for Russia and Czechoslovakia.

Refer to the table on page 20 for a list of the supported *countryid* codes, along with their default and alternate code pages.

If a copy of KEYB has already been run, it is reconfigured to the new specifications. While KEYB is active, you can switch back to a U.S. layout at any time by pressing Ctrl+Alt+F1 (Alt+Left-Shift for Russian and Czech Republic keyboards). You can toggle back to the alternate layout by pressing Ctrl+Alt+F2 (Alt+Right-Shift for Russian and Czech Republic keyboards).

Examples

```
KEYB GR
KEYB GR, 437
KEYB GR, , C:\TOOLS\KEYBOARD.SYS
```

Each of these commands establishes a German keyboard layout. The first and third use code page 850, while the second uses code page 437. In the third case, the KEYBOARD.SYS file is located in the C:\TOOLS directory.

KEYBOARD.SYS/KEYBRD2.SYS

Support Files

KEYBOARD.SYS and KEYBRD2.SYS are keyboard code page data files for use with the International keyboard driver, KEYB.COM.

Syntax

Refer to KEYB.COMERASE for usage instructions.

Remarks

Currently, keyboard data for all countries except Russia and Czechoslovakia are found in KEYBOARD.SYS. The file KEYBRD2.SYS contains the data for Russia and Czechoslovakia.

LABEL

External Command

The LABEL command sets or deletes a disk volume label.

Format

LABEL [drive:] [volume string]

Remarks

The volume label may be up to 11 characters in length. LABEL only uses the first 11 characters of a volume label. The characters that are acceptable in a volume label are the same as those for a filename.

LABEL prompts as follows. Enter the new label and press enter to modify the existing label.

```
Volume in drive C is xxxxxxxxxxxx
```

```
Volume label (11 characters, ENTER for none)?
```

If a volume label has previously been assigned to a disk, and you do not enter a new volume label, the following message is printed.

```
Delete current volume label (Y/N)?
```

If the disk did not have a volume label prior to running the LABEL command, the above message will not appear.

Example

```
LABEL a:
```

LABEL displays the volume label of drive A:, if one exists, and allows it to be modified or deleted.

LASTDRIVE

CONFIG.SYS Command

The LASTDRIVE command sets the maximum number of drives.

Syntax

LASTDRIVE = *letter*

Remarks

letter may be any character between A and Z and is the last drive letter that ROM-DOS can access. The default value for *letter* is E.

The minimum number for LASTDRIVE is the number of drives in your computer. If *letter* is less than number of drives in your computer, then the LASTDRIVE command is ignored.

LASTDRIVE is often used to cause ROM-DOS to make more space for nonstandard drives that are not in your system. These drives may be CD-ROM drives, flash disk drives, or network drives.

Example

```
LASTDRIVE = H
```

Causes ROM-DOS to allocate space for eight drives. If the computer has five drives installed, there is room for three additional nonstandard drives.

LOADHIGH

CONFIG.SYS, Internal Command

The LOADHIGH command loads an executable or TSR program into the upper memory area, if available. LOADHIGH can be run as a batch file command or from the DOS command line.

Syntax

LOADHIGH = *executable* [*arguments*]

-or-

LH = *executable* [*arguments*]

Remarks

An executable or TSR program can be loaded into the upper memory areas when they are available and have enough free upper memory to accommodate the program's needs. To make high memory available, the EMM386.EXE and HIMEM.SYS utilities must be loaded. If these utilities are not loaded or there is not enough upper memory available, the program loads into conventional memory.

The full drive path and filename of the device must be specified. The arguments are different depending on the device driver.

Example

```
LOADHIGH=C:\apps\checkit.exe /p
```

Installs an executable named CHECKIT with its command line arguments as specified. The program loads into upper memory, if available.

LONGDIR.EXE

External Command

The LONGDIR.EXE command provides a directory listing of files in a single directory including files with long file names.

Syntax

```
LONGDIR [*] [*x*][“directory name\file name mask*”]
```

Remarks

The LONGDIR command operates only if Long File Name support is enabled within the ROM-DOS kernel. This option is included at development time and cannot be added without the ROM-DOS Development Kit tools.

Subdirectories and paths are not supported with LONGDIR, except within the name mask syntax.

Options

The * option causes LONGDIR to display all files and directory names in the current directory. Both long and standard file named files are displayed.

The *x* option is used to find files or directory names within the current directory that have the character “x” in the name. “x” should be replaced with any valid character.

The *“directory name\file name mask”* option is used to find files that begin with the “file name mask”. If no directory name is provided, the files in the current directory are searched for matches. A drive letter can be used as part of the directory name. If an * is used for the file name mask, all files in the named directory are listed.

Examples

```
LONGDIR *
```

Lists all files in the current directory, including those with long file names.

```
LONGDIR *v*
```

Lists all files in the current directory that have the letter “v” in the file name.

```
LONGDIR "a:\Long File Named Files\test*"
```

Lists all files in the “a:\Long File Named Files” directory that have a file name starting with “test”.

The directory name need not be a long file name, it can be a standard name.

```
LONGDIR "temp\*"
```

Lists all files in the subdirectory “temp” (one level below the current directory).

MEM

External Command

The MEM command displays the used and free memory in your system.

Syntax

```
MEM [/BiosExtensions] [/Classify] [/Raw]
```

Remarks

Options	Description
/B	Displays each BIOS extension and its size.
/C	Classifies the memory usage.
/R	Does raw dump of the MCB chain.

MEM displays a list of the DOS memory contents, what free space is available, and how much memory is in conventional memory, upper memory, the HMA and extended memory. This program is useful to fine tune the system to have as much free memory as possible for applications.

Options

The /B option displays BIOS extensions in the range from C000:0 to F800:0.

The /C option shows program, TSR, and device driver sizes.

The /R option shows a low-level DOS listing of MCBs (Memory Control Blocks).

MENUCOLOR

CONFIG.SYS Command

The MENUCOLOR command allows you to set the text and background colors for the startup menu. This command can only be used in a menu block within your CONFIG.SYS file.

Syntax

```
MENUCOLOR = text_color [,background_color]
```

Remarks

The *text_color* argument selects the display color for the screen text. The color numbers 0 to 15 can be selected from the list below for the text color.

The *background_color* argument is optional. If a value is not entered, the default color 0 (Black) is used. Be sure to specify different colors for background and text, and separate the numbers with a comma. For best results, choose contrasting colors. Only the color numbers 0 to 7 can be used as the background color designation.

For systems whose BIOS does not directly support a video display, such as Datalight's miniBIOS, the standard CONFIG.SYS menu commands, which rely on BIOS screen support, are unusable.

To use these commands, the color number sequence of 0 for text_color and the default background color (black), or 0,0 for text and background colors can be selected. These numbers represent a color choice of black text with a black background, which is an unusable choice for screen viewing. Using the black/black combination in the MENUCOLOR command line signifies to ROM-DOS to display the startup menu in TTY mode without using BIOS screen/cursor positioning or color changing commands.

Color Values:

0-Black	1-Blue	2-Green
3-Cyan	4-Red	5-Magenta
6-Brown	7-White	8-Gray
9-Bright Blue	10-Bright Green	11-Bright Cyan
12-Bright Red	13-Bright Magenta	14- Bright Yellow
15-Bright White		

Examples

```
MENUCOLOR=14,1
```

Displays the menu text in bright yellow on a blue background.

```
MENUCOLOR=5
```

Displays the menu text in magenta with a default background of black.

MENUDEFAULT

CONFIG.SYS Command

The MENUDEFAULT command allows you to set the default menu-item choice and a time-out value for making a menu selection. This command can only be used within a menu configuration block in the CONFIG.SYS file. Refer also to 'Using Multiple-User Configurations' on page 13.

Syntax

```
MENUDEFAULT = blockname[,timeout]
```

Remarks

The *blockname* argument specifies the default menu item. The value for *blockname* must match a configuration block name defined elsewhere in your CONFIG.SYS file.

The optional time-out argument represents the number of seconds ROM-DOS waits for a user input selection before initializing your system with the default configuration. The time-out period can be set to a value between 0 and 90. If you select 0, the default menu item is automatically implemented without a wait. If you do not enter a time-out value, ROM-DOS will not continue until the Enter key is pressed.

If your system BIOS does not support a video display directly, such as Datalight's miniBIOS, please refer to the MENUCOLOR command for special instructions.

Example

```
[MENU]
menuitem=Word_Proc, Word Processing
menuitem=Network, Network
menuitem=Research, Research and Development
```



```
menucolor=15,1
menudefault=Word_Proc,20
```

Makes the Word_Proc configuration block the default menu item. If you fail to make a selection within 20 seconds, the Word_Proc block is processed.

MENUITEM

CONFIG.SYS Command

The MENUITEM command allows you to specify an item on the startup menu. This command can only be used within a menu configuration block in the CONFIG.SYS file. Refer also to 'Using Multiple-User Configurations' on page 13.

Syntax

```
MENUITEM = blockname [,menu_text]
```

Remarks

The *blockname* argument is a user-defined label given to a configuration block defined elsewhere in the CONFIG.SYS file. If a user selects the menu item, all commands in the selected configuration block are processed, along with the instructions that are common to all menu choices (denoted by block header [COMMON]). The *blockname* can be up to 70 characters long and may contain most printable characters, including spaces, backslashes (\), forward slashes (/), commas, semicolons (;), equal signs (=). Square brackets ([]) cannot be used in block names.

The *menu_text* option is a descriptive statement that defines the *blockname*. The *menu_text* is displayed on the screen as a line item in the startup menu. The *menu_text* argument can be up to 70 characters long and can contain any characters. If this argument is left off, the *blockname* is used for the startup menu display.

If your system BIOS does not support a video display directly, such as Datalight's miniBIOS, please refer to the MENUCOLOR command for special instructions.

Examples

```
[MENU]
menuitem=Word_Proc, Word Processing
menuitem=Network, Network
menuitem=Research, Research and Development
menudefault=Word_Proc,20
```

Defines three menu items: Word_Proc, Network, and Research and Development. Each of these has descriptive text and a set of commands defined later in the CONFIG.SYS file. At boot time, these menu items are displayed in the startup menu as follows:

```
ROM-DOS 6.22 STARTUP MENU
1. Word Processing
2. Network
3. Research and Development
Enter a choice: 1
```

MKDIR (MaKe DIRectory)

Internal Command

The MKDIR command creates a new subdirectory.

Syntax

```
MKDIR [drive:] [path] subdir
```

```
MD [drive:] [path] subdir
```

where *subdir* is the name of the new subdirectory to be created. Note that MD may be used instead of MKDIR.

Remarks

If no drive or path is specified, the new subdirectory is created within (one level below) the current default directory.

If drive and/or path is specified, everything specified must exist or the command displays an error message.

Examples

```
MKDIR TEMPDIR1
```

Creates a new subdirectory named TEMPDIR1 within the current default directory.

```
MD C:\UTIL\TOOLS
```

Creates a new subdirectory named TOOLS within UTIL, assuming the subdirectory exists.

MODE

External Command

The MODE command modifies the operation of the printer, serial port, and active video display.

Syntax

```
MODE LPT#[:]=COM#[:]
```

```
MODE COM#:baud[,parity[,databits[,stopbits[,P]]]]
```

```
MODE <video mode>
```

```
MODE <display lines>
```

Remarks

The first syntax above redirects line printer output to the serial port.

The second syntax above changes the operation of the specified communications port. The options that can be modified are listed below. Invalid values for any of the options are flagged with an error message.

```
baud          110, 150, 300, 600, 1200, 2400, 4800, 9600
parity        N - None, O - Odd, E - Even
databits      Either 7 or 8
stopbits      Either 1 or 2 stop bits
P             Printer Port
```

Using the P option as the last argument causes output to be sent repeatedly to the printer port until successfully received. Without the P, output is sent only once, causing a critical error if unsuccessful.

The third syntax changes the active video mode for the display terminal. The valid choices for this version of the MODE command are as follows:

40—Indicates 40 characters per line.

80—Indicates 80 characters per line.

bw40—For a color graphics adapter with color disabled and 40 characters per line.

bw80—For a color graphics adapter with color disabled and 80 characters per line.

co40—Indicates a color monitor with color enabled and 40 characters per line.

co80—Indicates a color monitor with color enabled and 80 characters per line.

mono—For a monochrome display. Assumes 80 characters per line.

The final syntax sets the number of display lines. Valid values included L25, L43, and L50.

Note: A serial port should be initialized before an LPT device is redirected to it.

Examples

```
MODE COM1:9600,n,8,1
```

Modifies the settings for the COM1 device to a baud rate of 9600, no parity, eight data bits, and one stop bit.

```
MODE LPT2:=COM2
```

Redirects the output from LPT2 to the COM2 serial port. All following output to LPT2 actually goes to the COM2 device.

```
MODE mono
```

Indicates a monochrome display adapter.

MORE

External Command

The MORE command displays a text file one screen at a time.

Syntax

```
MORE [filename]
```

or

```
<command> | MORE
```

Remarks

The input to MORE may come from a file, or it may be piped in from another filter or a DOS command. If the *filename* is present, then the file is viewed; otherwise MORE reads from the Standard Input.

Once a screen has been viewed, a line is displayed on the bottom of the screen indicating the percent of the file that has been viewed. At this point, there are several options for the next lines of text to be viewed.

B	Display the previous full page.
<enter>	Display just one more line.
T	Display starting at the top of the file.
Spacebar	Display the next full page of text.
Q	Exit MORE

Examples

```
DIR | MORE
```

Displays a directory one screen at a time.

```
MORE READ.ME
```

Displays the file READ.ME one page at a time.

MOVE

Internal Command

The MOVE command moves files and renames files and directories.

Syntax

To move one or more files:

```
MOVE [/Y | /-Y] [drive:][path]filename1[,...] destination
```

To rename a directory:

```
MOVE [/Y | /-Y] [drive:][path]dirname1 dirname2
```

Remarks

[drive:][path]filename1 specifies the location and name of the file or files you want to move.

destination specifies the new location of the file. Destination can consist of a drive letter and colon, a directory name, or a combination. If you are moving only one file, you can also include a filename if you want to rename the file when you move it.

[drive:][path]dirname1 specifies the directory you want to rename.

dirname2 specifies the new name of the directory.

Options

/Y suppresses prompting to confirm creation of a directory or overwriting of the destination.

/-Y causes prompting to confirm creation of a directory or overwriting of the destination. The */Y* option may be present in the COPYCMD environment variable. This may be overridden with */-Y* on the command line.

MSCDEX

Installable Device Driver

The Datalight CD-ROM driver enables CD-ROM drives.

Syntax

MSCDEX [options]

Remarks

Options	Description
/D:<Name>	CD-ROM device name (default MSC002)
/L:<Letter>	Specifies the drive letter for CD-ROM drive
/M:<Number>	Specifies the number of sector buffers (default 4)
/X	Use extended memory for CD-ROM buffers

A low-level driver from the CD-ROM drive manufacturer interfaces to the actual CD-ROM hardware while the Datalight CD-ROM driver provides the interface between ROM-DOS and that hardware driver. This interface is called the Microsoft CD-ROM extensions (or MSCDEX).

For each hardware driver loaded, use the /D: option to specify the name of that driver. The default name is MSC002.

The /L: option specifies the drive letter to use for the CD-ROM drive. The default driver letter is the next available. To increase the number of available drive letters, use the LASTDRIVE command in CONFIG.SYS.

The /M: option specifies the number of buffers to use to speed up CD-ROM drive access.

The /X option puts those buffers in extended memory rather than conventional memory.

Examples

```
MSCDEX /D:MSC003
```

Installs the CD-ROM driver using MSCD003 as the device name.

```
MSCDEX /L:G
```

Installs the CD-ROM driver using G as drive letter.

```
MSCDEX /M:6 /X
```

Installs the CD-ROM driver using six buffers allocated in XMS.

NEWFILE

CONFIG.SYS Command

The NEWFILE command allows you to continue CONFIG.SYS file processing from a new file. The file can be located in another directory or even on a different drive.

Syntax

NEWFILE=*filename*

Remarks

The NEWFILE command is especially useful when the CONFIG.SYS file is located on an inaccessible drive or in ROM. Additional device drivers or instructions can be added easily to the new file and is processed along with the main CONFIG.SYS file upon starting the system.

When the NEWFILE= instruction is processed, control passes from the present file (the one containing the NEWFILE instruction) to the file specified in the command. Any commands placed after the NEWFILE instruction in the original file are not processed.

If the specified filename cannot be located, CONFIG.SYS processing returns to the original CONFIG.SYS file and the next instruction is processed. The next instruction can even be a second NEWFILE= statement, allowing flexibility for systems which may have a variety of drives installed or not installed at boot time. The first successful NEWFILE statement is processed, transferring control to the specified filename. The remaining instructions in the original CONFIG.SYS file, including NEWFILE= statements, are not processed.

NEWFILE commands can be nested. That is, your original CONFIG.SYS can call a second set of instructions via the NEWFILE command. The second file can, in turn, call a third file by using the NEWFILE command, and so on. Be sure that each filename in the successive steps has a unique name, otherwise, you will create an infinite loop as control is passed back to the same file repeatedly.

When NEWFILE is used, it is also created as an environment variable, retaining the value assigned by the NEWFILE= statement. This can be used in an AUTOEXEC.BAT file for further boot-up decision-making.

Examples

```
NEWFILE=C:\BIN\NEWCFG.SYS
```

Causes instructions in the file NEWCFG.SYS, located in the C:\BIN directory, to be executed as part of the CONFIG.SYS file. The contents of NEWCFG.SYS may include any of the commands listed in this section.

Also, the environment will contain the following entry:

```
NEWFILE=C:\BIN\NEWCFG.SYS
```

Verify this by running the SET command with no parameters.

NUMLOCK

CONFIG.SYS Command

The NUMLOCK command sets the NumLock key on the keyboard to ON or OFF when your computer starts.

Syntax

```
NUMLOCK=[on|off]
```

Remarks

Selecting ON designates that the NumLock key is set to on when DOS boots. Selecting OFF designates that the NumLock is off when DOS boots. In either case, you still have the ability to manually turn the NumLock key on and off after booting with the NUMLOCK command.

Example

```
NUMLOCK=on
```

Sets the NumLock key to on when the system boots.

PATH

Internal Command

The PATH command sets the search path for command files that are not in the current directory.

Syntax

```
PATH [drive:][path][;[drive:][path]] ...
```

Remarks

Without a specified search path, ROM-DOS looks for an external command file (one with a .BAT, .COM, or .EXE extension) only in the current directory. The PATH command tells ROM-DOS which other directories to search after searching the current directory.

To append one or more additional directories to the PATH, use %PATH% for the current path. For example, to add C:\DOS to the current path, enter:

```
PATH %PATH%;C:\DOS
```

at the command prompt.

Enter PATH without parameters to display the current path.

To cancel previously-set command paths, enter:

```
PATH =
```

or

```
PATH =;
```

Example

If your application programs reside on a fixed disk, the PATH command enables you to start any of them from any drive or directory. To access utilities, a word processor, and a spreadsheet in subdirectories C:\UTIL, C:\WP, and C:\123, set the path command as follows:

```
PATH C:\UTIL;C:\WP;C:\123
```

PAUSE

Batch File, Internal Command

The PAUSE command suspends the execution of a batch file and resumes operation when any key is pressed.

Syntax

```
PAUSE
```

Remarks

A batch program may require that you perform some action such as changing disks or choosing to continue or terminate the operation. When the command processor encounters PAUSE, it suspends execution and displays the message

```
Strike a key when ready...
```

After you perform the appropriate action, or make a decision, striking any key other than the combinations Ctrl+C or Ctrl+Break resumes the batch job.

If you press Ctrl+C or Ctrl+Break at this point, ROM-DOS displays

```
Terminate batch job (Y/N)?
```

Responding Y ends the batch job. Strategic placement of the PAUSE command, working with this query, allows you to divide the batch file into sections so you can end it at some intermediate point.

The *message* option allows you to display a reminder on the screen during the pause. Your message precedes the “Strike a key” message. Note, however, that your message appears only if ECHO is on.

Example

```
PAUSE Place blank disk in drive A:
```

Prompts the user to insert a disk and suspends operation until a key has been hit.

POWER.EXE

Installable Device Driver

POWER.EXE conserves power on a system that has APM (Advanced Power Management) by shutting down various subsystems (screen, disk drives, etc.) that are not being used. POWER.EXE can be used in an INSTALL command in CONFIG.SYS, in AUTOEXEC.BAT or on the command line.

Syntax

From command line or AUTOEXEC.BAT, enter

```
[path]power[options]
```

From CONFIG.SYS, enter

```
Install=[path]power[options]
```

Remarks

The system BIOS must support the following APM functions for POWER.EXE to work

Function	Description
00	APM Installed
01	Connect
04	Disconnect
05	CPU idle
06	CPU busy
07	Set Power State
08	Get PM Event

For each device, you can specify the length of time that the device must be inactive before it is turned off. If you specify a length of zero for a device, POWER.EXE disables power management for that device.

The (#) argument for each command option defines the number of seconds the device can remain inactive before it is powered down.

Options

The /C# option sets the inactive time for the COM ports. The default value is two seconds.

The /D# option sets the inactive time for the disks. The default value is 30 seconds. Currently, all disk drives are treated as a single device.

The /P# option sets the inactive time for printers. The default time is two seconds.

The /S# option sets the inactive time for the screen. The default time is nine seconds.

The /H option displays a user help screen.

The /K options sets the keyboard time.

The /ADV:MIN argument provides the minimum (most responsive) power reduction.

The /ADV:REG argument provides the standard power reduction.

The /ADV:MAX argument provides the maximum (least responsive) power reduction.

The /STD argument provides the standard power reduction.

The /OFF argument turns power management off.

Example

```
POWER /S20 /C0 /P0
```

Runs POWER, turning off the screen after 20 seconds of inactivity, never turning off the COM and printer ports, and uses the default inactivity period for the disk drives (30 seconds) and keyboard.

PRINT

External Command

The PRINT command prints a single file or a list of files.

Syntax

```
PRINT [/drive:] [filename] [/options]
```

Remarks

PRINT allows you to enter between one and 32 files for spooling to the printer. The files are output to the device in a spooled manner (while you perform other operations).

If PRINT is entered without any parameters, it displays all the files that are in the queue.

The first time PRINT is used, the operator is prompted with this message for the device to perform the operation.

```
Name of list device [PRN]:
```

The legal devices for printing are LPT1, LPT2, LPT3, LPT4, COM1, COM2, COM3, COM4, AUX, or PRN.

Options

The /B option sets the buffer size. The default buffer size is 512 bytes. A larger buffer size causes print to operate faster. The maximum buffer size is 32KB and the minimum size is 256 bytes. This option is only allowed the first time PRINT is run.

The /C option cancels only the filenames listed after the /C command.

The /F option sets the maximum number of files to be queued up at one time. The default number of files is ten. The minimum is two and the maximum is 32. Support for more files is often useful when using wildcards in filenames. This option is only allowed the first time PRINT is run (or until the next system reboot).

The /P option causes all files listed after this option to be submitted for printing. This is the default for filenames encountered on the PRINT command line.

The /T option cancels all the files from the print queue (list).

The /H option displays the help screen.

Examples

```
PRINT FILE1.TXT FILE2.TXT FILE3.TXT
```

Puts three files into the print queue. The first file prints after the command ends.

```
PRINT /C FILE2.TXT
```

Removes file FILE2.TXT from the print queue. All other files in the queue print normally.

```
PRINT /T
```

Cancels all files in the print queue. Printing may continue for a short time because of the buffer in your printer.

PROMPT*Internal Command*

The PROMPT command changes the ROM-DOS command prompt.

Syntax

```
PROMPT [text] [Scharacter] [Scharacter...]
```

Remarks

The prompt that ROM-DOS normally displays is the letter of the current drive followed by a right angle bracket (>) (the greater-than symbol). By using the PROMPT command, you can change this prompt to include any combination of a message, the current directory, the date, the time, and some other features.

Code	Corresponding Prompt
\$T	Current time
\$D	Current date
\$P	Current drive and path
\$V	ROM-DOS version number
\$N	Current drive
\$G	The > character

Code	Corresponding Prompt
\$L	The < character
\$B	The character
\$Q	The = sign
\$H	A backspace (which erases the previous character)
\$E	ASCII code for Escape (X'1B')
\$_	Start a new line (carriage return)
\$\$	The \$ character

Examples

To show this prompt

```
Current directory is drive:\path;
Ready for <command>
```

enter

```
PROMPT Current directory is $P;$_Ready for $Lcommand$G
```

To show the date, time, and current directory on separate lines followed by the greater-than character and a space, enter:

```
PROMPT $D$_T$_P$G<space>
```

where <space> refers to pressing the spacebar once. The resulting prompt is

```
Mon 6-26-1989
10:17:45.99
A:\> _
```

REM (REMark)

Batch File, Internal Command

The REM command has two purposes: to allow comments in a batch or CONFIG.SYS file, and to temporarily disable a command without physically deleting the command from the file. See also the (;) command.

Syntax

```
REM [message]
```

Remarks

The REM command provides information but has no effect on the execution of the batch file.

The comment may consist of any set of characters. You may also create a blank line by omitting the *message* portion of the line.

REM can also be used to temporarily disable a command in a batch file or CONFIG.SYS without having to delete the line from the file.

Examples

```
REM This batch file created by
REM Jane Doe
```

These lines may be added at any point in a batch file as user information only.

```
DEVICE=HIMEM.SYS
DOS=HIGH
REM DEVICE=TESTDEV.SYS /P
```

Temporarily removes the DEVICE=TESTDEV.SYS statement from these CONFIG.SYS instructions. This statement is not processed again until REM is removed.

REMQUIT.EXE

External Command

The REMQUIT command terminates the REMSERV program via the serial port. This command allows the host machine to terminate the program running on the target without accessing the target machine directly.

Syntax

```
REMQUIT
```

Remarks

This program only terminates the REMSERV program and does not work in reverse to terminate the REMDISK program.

Examples

```
REMQUIT
```

Terminates the running REMSERV program when run from the remote system attached via a serial connection.

REN (REName)

Internal Command

The REN command changes the name of a file.

Syntax

```
REN [drive:] [path] filename1 filename2
```

Remarks

REN renames files within a directory; it does not move a file to a different drive or directory as part of the command.

The wildcard characters * and ? may be used to rename more than one file at a time.

ROM-DOS does not allow you to give a file a name that matches the name of an existing file in the same directory.

Examples

```
REN B:NOTES.DOC REPORT.DOC
```

Renames the file NOTES.DOC in drive B: to REPORT.DOC.

```
REN *.DOC *.TXT
```

Assigns the extension .TXT to all files with the current extension .DOC.

RESTORE

External Command

The RESTORE command is the complement program to BACKUP. It restores files previously saved with BACKUP to the hard disk.

Syntax

RESTORE <srcdrive> [dstpath] [options]

Remarks

Option	Description
/D	Show directory of files in backup volume(s).
/P	Prompt only if destination file already exists and is a hidden, system, or read-only file, or is marked as changed. Do not prompt on unchanged existing files.
/S	Restore all subdirectories.
/Y	Answer Yes to all prompts.

The <srcdrive> is the drive to restore from and may include an optional file mask. For example, RESTORE A:*.*.C restores only those files ending with .C from the backup set in drive A.

The <dstpath> must be a DOS destination path. If no destination path is given, RESTORE assumes the current directory. The destination may contain wildcards (which override wildcards placed in the <srcdrive> option).

Options

The /D option just displays a directory of what files are in the backup set, similar to DIR. This is useful if you are not sure what files or dates/times are in the backup set.

The /S option restores from subdirectories as well.

The /Y option is useful when running RESTORE from a batch file. Any entire set from another hard drive or network drive can be restored without user input.

Examples

```
RESTORE A: /D
```

Displays files in the backup.

```
RESTORE A: D:TEMP\fx*.fh /S
```

Completes restore, with subdirectories, of all files whose filenames begin with fx and have a .fh file extension.

```
RESTORE B:*.* /S
```

Restores only files with a .C file extension to the current directory.

RMDIR (ReMove DIRectory)

Internal Command

The RMDIR command removes (deletes) a specified empty subdirectory.

Syntax

```
RMDIR [drive:][path]subdir
```

```
RD [drive:][path]subdir
```

subdir is the name of the subdirectory being deleted. Note that RD may also be used.

Remarks

If no drive or path is specified, RMDIR looks for the specified *subdir* within (one level below) the current default directory. If a drive or path is specified, everything specified must exist or ROM-DOS displays an error message.

RMDIR does not remove a subdirectory unless it is empty. An error message is displayed when you attempt to remove a subdirectory that still contains files or other subdirectories.

Example

```
RD TOOLS
```

Removes the TOOLS subdirectory from the current directory, assuming TOOLS is an empty directory.

SET

Internal Command

The SET command sets, displays, or removes environment variables.

Syntax

```
SET [variable = [string]]
```

Remarks

Use the environment variables to control the behavior of programs and batch files and also the behavior of ROM-DOS. Use this command in the AUTOEXEC.BAT and CONFIG.SYS files and on the DOS command line. The environment variables that can be defined with the set command include, but are not limited to, PATH, COMSPEC, PROMPT, and user-defined variables.

Using SET *variable* = with no argument string clears the current environment string for the named variable.

Examples

```
SET PROMPT = $p$g
```

Sets the prompt, although the prompt can also be set with the PROMPT command.

```
SET PROMPT =
```

Clears any previously set prompt settings and returns the prompt to its default state.

SHARE

External Command

The SHARE command installs the capabilities for file sharing and file locking on your hard disk.

Syntax

```
SHARE [/L:nn] [/u]
```

Or from CONFIG.SYS

```
INSTALL=[d:][path]SHARE.EXE [/options]
```

Remarks

The SHARE utility is most commonly used in a network or multitasking environment where file sharing is necessary. When SHARE is loaded, DOS utilizes the SHARE utility to validate read and write requests from application programs and users.

Options

The /L:nn option specifies the maximum number of files that can be locked at one time. The default number is 20.

The /U option unloads the share utility and frees the memory. SHARE does not unload if other TSRs have been loaded on top of it. The other TSRs must be unloaded first before trying to unload SHARE.

Examples

```
SHARE
```

Loads the SHARE program from the command line.

```
INSTALL=C:\UTILS\SHARE.EXE /L:30
```

Installs SHARE from the CONFIG.SYS file and changes the maximum number of locked files to 30.

```
SHARE /U
```

Unloads SHARE and frees the used memory.

SHELL

CONFIG.SYS Command

The SHELL command allows you to specify a command interpreter other than the default COMMAND.COM or to load COMMAND.COM with non-default arguments (parameters). ROM-DOS boots this new program, with arguments, instead of that specified internally.

Syntax

```
SHELL = cmd_interpreter arguments
```

Remarks

The SHELL command is most often used to start the initial copy of COMMAND with special parameters. One parameter provides a larger environment than the default 128 bytes.

The *cmd_interpreter* can be any executable program. The full path, including drive letter, should be specified if the program is not in the root directory of the default drive.

Arguments are optional and program-specific and vary depending on the *cmd_interpreter* being executed by the SHELL command.

Examples

```
SHELL=C:\COMMAND.COM /E:512 /P
```

Boots the standard Command Processor but sets the environment space to 512 bytes (up from the default 128). The /P parameter tells COMMAND that it is permanent (cannot terminate).

```
SHELL = C:\TEMP\MYPROG.EXE
```

Boots a program named MYPROG.EXE, located in the directory TEMP, instead of the standard Command Processor.

SHIFT

Batch File, Internal Command

The SHIFT command moves each replaceable parameter for a batch file one position to the left. Execution of the SHIFT command allows use of more replaceable parameters in a batch file beyond the standard set of %0 through %9.

Syntax

```
SHIFT
```

Remarks

This command moves the string or value stored for each replaceable parameter one position to the left. Upon execution of SHIFT, the %0 argument assumes the value of the %1 argument, the %1 argument then assumes the value of the %2 argument, and so on.

Example

The following batch file reads in a list of files (provided as arguments on the command line) and displays each one to the screen. After displaying each one, the SHIFT command copies the next file in the argument list into the %1 slot, verifying the existence of the file, and continues.

```
Command line argument:
TYPEIT autoexec.bat config.sys net.bat
TYPEIT.BAT batch file:
:repeat
if EXIST %1 goto doit
goto end

:doit
type %1
pause
shift
goto repeat

:end
@echo All Done
```

SORT

External Command

The SORT command sorts a text file and displays the output to the standard device.

Syntax

```
SORT [ /options ] [filename]
```

Remarks

SORT normally starts its comparisons at the first character in a line.

The input to SORT may come from a file, or it may be piped in from another filter or a DOS command.

Options

The /+n option causes SORT to begin its alphabetical sorting starting at the nth position in the string.

The /r option causes SORT to sort in the reverse alphabetical order.

Examples

```
SORT NAMES.LST
```

Sorts the file NAMES.LST and displays the output to the screen.

```
DIR | SORT /+14 | MORE
```

Produces a directory and then sorts the directory by file size (the file size in a directory display starts on the 14th position in each line or string). The output display is then shown one screen at a time using the MORE command.

STACKDEV.SYS

Config.sys Command

The STACKDEV.SYS command is used to increase the number of stacks available for IRQ handlers and Int13h. The standard STACKS= command for ROM-DOS increases stack space for the DOS stacks only.

Syntax

```
DEVICE=STACKDEV.SYS
```

Remarks

Under various conditions, a stack overflow error occurs while booting ROM-DOS, usually during the CONFIGY.SYS or AUTOEXEC.BAT file processing. For example, some other program may service an interrupt and not provide its own stack for that purpose. If, inside its interrupt handler, the program consumes a lot of stack space by allocating many automatic variables, calling other interrupt handlers, or by deeply nesting sub-routines, then the interrupt handler may overflow the stack of the program that it interrupted. This situation usually results in a system crash.

The STACKDEV.SYS device driver handles stack support similar to MS-DOS' internal Stacks support. STACKDEV increases the stack space available for IRQ handlers and Int13h by

switching to a local stack each time an interrupt occurs. STACKDEV does not allocate the stacks from a pool, instead, each interrupt on the list is given exactly one stack with a fixed stack size of 128 bytes.

STACKDEV differs from the internal STACKS= support with ROM-DOS in that the STACKS= command is used to allocate stack space for ROM-DOS' own internal stacks and does not add additional stack support for IRQs.

Examples

```
DEVICE = STACKDEV.SYS
```

Loads the STACKDEV.SYS device driver during CONFIGY.SYS processing. This driver should be loaded early in the file so that it can handle the IRQ stack needs of other device drivers or programs.

STACKS

CONFIG.SYS Command

The STACKS command enables the dynamic use of data stacks to handle hardware and software interrupts that use large amounts of stack space. You may use this command only in your CONFIG.SYS file. Use the STACKS command if the system crashes or encounters a stack overflow during the boot or at runtime.

STACKS uses more RAM for the DOS stacks, which you can calculate with the formula (number-of-stack*stack-size). The maximum extra DOS stack size is 32KB (64*512).

Syntax

```
STACKS = n,s
```

Remarks

n specifies the number of stacks. Valid values for *n* are 0 and integers in the range 8 through 64.

s specifies the size (in bytes) of each stack. Valid values for *s* are 0 and integers in the range 32 through 512.

SUBMENU

CONFIG.SYS Command

The SUBMENU command defines a menu item that represents a secondary menu when selected. This command may only be used within a menu configuration block in the CONFIG.SYS file.

Syntax

```
SUBMENU=blockname [ , menu_text ]
```

Remarks

The *blockname* argument defines the name of the secondary menu block of commands. The block menu must be defined elsewhere in the CONFIG.SYS file, otherwise, ROM-DOS leaves this item off of the startup menu. The label can be up to 70 characters long and can contain most printable

characters, including spaces, backslashes (\), forward slashes (/), commas (,), semicolons (;), and equal signs(=). Square brackets ([]) cannot be used in blocknames.

The optional *menu_text* argument specifies the text that ROM-DOS displays for this menu item on the startup menu. If this argument is left out, ROM-DOS displays the *blockname* as the text. The *menu_text* can be up to 70 characters long and may contain any character.

The submenu can be defined with any user-provided descriptive label. It need not have the [MENU] label.

Example

```
[MENU]
menuitem=Word_Proc, Word Processing
menuitem=Network, Network
submenu=Research, Research and Development
menucolor=15,1
menudefault=Word_Proc,20
  [WORD_PROC]
  files=10
  buffers=10
  lastdrive=m
  device=c:\network\loadnet.sys
[NETWORK]
include=Word_Proc
numlock=off
  [RESEARCH]
  menuitem=proj1, Project 1
  menuitem=proj2, Project 2
  menudefault=proj1
  [PROJ1]
  files=50
  buffers=25
  numlock=on
  [PROJ2]
  files=10
  buffers=20
  device=vdisk.sys 64 /e
  numlock=off
```

In the preceding example, a submenu is defined as one of the startup menu choices. When you select Research and Development from the first menu, a secondary menu is displayed, offering the choices of Project 1 and Project 2. The actual commands for Project 1 and Project 2 are defined in the configuration blocks labeled PROJ1 and PROJ2.

SUBST

External Command

The SUBST command allows one drive to appear as another drive. This is useful for creating a consistent drive letter when the drive and/or path may change.

Syntax

```
SUBST [d: [drive:path | /D ]]
```

Options

The /D switch disables the substituted drive letter (un-installs it)

Remarks

SUBST without any options displays the currently substituted drives. The path may be any legal DOS path, including network drives.

Examples

```
SUBST e: b:\subdir
```

SUBSTitute drive E: to use B:\SUBDIR

```
SUBST
```

Displays all SUBSTituted drives.

```
SUBST e: /D
```

Drive E: is no longer SUBSTituted.

SWITCHES

CONFIG.SYS Command

The SWITCHES command allows special CONFIG.SYS file options.

Syntax

```
SWITCHES=[/k][/n][/f]
```

Remarks

The /k argument makes an enhanced keyboard behave like a conventional keyboard.

The /n argument prevents the use of the F5 and F8 function keys to bypass the startup commands.

The /f argument instructs ROM-DOS to skip the delay after displaying the "Starting ROM-DOS..." message at boot time. The delay allows you time to use the F5 and F8 options to alter the processing of the CONFIG.SYS and AUTOEXEC.BAT files as described in page 16.

Example

```
switches = /n
```

Prevents you from using the F5 and F8 keys at boot time.

SYS

External Command

The SYS command copies the ROM-DOS system files ROM-DOS.SYS and COMMAND.COM from the disk in the default drive to the disk in the specified drive. The file ROM-DOS.SYS is renamed and stored on the disk as files IBMBIO.COM and IBMDOS.COM, which are stored as hidden files.

Syntax

```
SYS drive: [ /options ]
```

Remarks

Use the SYS command to transfer the ROM-DOS system files to a floppy disk or hard disk. The disk can be a formatted blank disk or can contain files; it is not necessary for the system files to be the first files on the disk. The only requirement is that there is enough contiguous free space on the disk for the new system files to be placed. If the disk already contains system files, installing the new system files deletes the existing files.

The command processor, COMMAND.COM, is also transferred to the disk and does not need to be copied into the same contiguous space as the system files.

You can run SYS three different ways. The first is to boot and run your system with ROM-DOS. When you run the SYS command this way, SYS copies the ROM-DOS system files and COMMAND.COM from the root directory of the default/current disk drive.

The second method is to run SYS from the root directory of a disk drive that has been previously prepared with the SYS command, but isn't booted and running. For example, you can run SYS from a bootable floppy disk to copy the files to the hard disk without actually booting from the floppy disk itself.

The third method uses the file ROM-DOS.SYS, the equivalent of the hidden system files IBMBIO.COM and IBMDOS.COM. ROM-DOS.SYS should be present in the same directory with COMMAND.COM and SYS.COM. These three files can be placed in the root directory or subdirectory on a floppy disk (that need not be booted or bootable), or in a subdirectory on the hard drive. Run the SYS command from the directory where the files reside to transfer the system files to the destination drive.

Options

The /C option prevents confirmation before transferring system files.

The /H option shows the newly transferred system files on the destination disk.

The /J option prevents display of the sign-on message.

Example

```
SYS B:  
Copies the ROM-DOS system files to drive B.
```

TIME

Internal Command

The TIME command displays the current time as shown on the system's internal clock. Allows resetting of the clock.

Syntax

TIME [hh:mm:ss] [pm|am]

Remarks

The time set by this command is used, among other things, for time stamping your file revision dates. This information is displayed when you execute a directory listing of your files.

You may want to include the TIME command in your AUTOEXEC.BAT file to set the date at boot time. If your computer has an internal, battery-operated clock, you won't need to do so.

The format of the time command is also dependent on the country specified in CONFIG.SYS. The time is displayed according to local standards for the specified country. Refer also to the DATE command.

If you just want to check the time maintained by ROM-DOS, enter the TIME command alone. ROM-DOS displays something like this

```
Current time is 3:00:02.48p
Enter new time:_
```

After which you press Enter to return to an empty command line.

When you want to change the time, you can include the desired time on the prompt line after the word TIME. Or you may enter the command with no option (as you do to check the time) and enter the new time before pressing Enter.

ROM-DOS displays the time according to the 24-hour clock with the *a* or *p* indicator to show AM or PM. The AM / PM indicator can be entered as *a* or *p* or as *am* or *pm*. The time may be entered in a 24-hour format or a 12-hour format with the AM or PM designators.

The allowed options for hours and minutes are

hh = 0-24 *mm* = 0-59 *indicator* = a, p, am, or pm

ROM-DOS displays time to hundredths of seconds. When entering time, however, you needn't enter seconds or hundredths; ROM-DOS assumes a value of zero if they are not specified.

You may skip the display and prompting by typing the current time after the word TIME on the command line

```
TIME 23:24
```

ROM-DOS accepts your entry as the current time.

Examples

To set the time to 11:15 p.m., enter

```
TIME 23:15 or TIME 11:15 p
```

To set the time to 9:26 a.m., enter

```
TIME 9:26 or TIME 9:26 am
```

TREE

External Command

The TREE command displays each subdirectory and, optionally, the files within them for a specified drive.

Syntax

```
TREE [drive:] [/options]
```

Remarks

The TREE command displays the full path of each subdirectory on a specified disk.

drive: specifies the drive that TREE displays the subdirectories from. This argument must be specified.

Option

The /F option causes TREE to display the files in each subdirectory.

Examples

```
TREE C:
```

Displays all subdirectories on drive C:.

```
TREE A: /F
```

Displays all subdirectories on drive A: along with the files within each subdirectory.

TYPE

Internal Command

The TYPE command displays the contents of a text file on the screen.

Syntax

```
TYPE [drive:] [path]filename
```

Remarks

If a file containing formatting codes or other nonalphanumeric characters is displayed with TYPE, unintelligible characters are displayed. This does not harm the system.

Example

```
TYPE A:AUTOEXEC.BAT
```

Displays the AUTOEXEC.BAT file on drive A.

UMBLINK.SYS

Config.sys Command

UMBLINK builds upper memory blocks (UMBs) which have a distinct MCB chain and may or may not be linked into the DOS MCB chain. UMBLINK can be used on some systems where EMM386 can not be used.

Syntax

```
DEVICE=UMBLINK.EXE [x=mmmm-nnnn]
```

Remarks

UMBLINK allows for the conversion of various RAM memory regions into DOS UMBs into which device drivers and TSRs may be loaded. UMBLINK is a simple device driver that, once installed, does nothing but filter the Int21h, Function 5803h calls to link and unlink the UMB arena from the normal DOS MCB chain. UMBLINK must appear before any DEVICEHIGH lines in your CONFIG.SYS File.

Unlike EMM386.EXE, UMBLINK.EXE is not a protected mode control program. It finds certain kinds of memory that already exists in the adapter space and links that memory into the DOS upper memory chain. It then becomes resident and, like Datalight's EMM386, becomes the UMB LINK handler for ROM-DOS. The memory types that UMBLINK can recognize are S-ICE.EXE UMBs (eliminating the need for Numega's UMB.SYS), XMS UMBs, and pre-existing RAM that is already either physically or logically addressable within the adapter space at the time the program is run.

Options

The `x=mmmm-nnnn` argument specified a hex segment range of existing RAM to be excluded from the UMB conversion process. Both `mmmm` and `nnnn` must be in the range `C000:0h` to `F000:0h`.

Examples

```
DEVICE=UMBLINK.SYS X=C000 - C800
```

Load `UMBLINK.SYS` and exclude the range from `C000:0h` to `C800:0h` from the UMB creation process.

VDISK

Installable Device Driver

VDISK is a device driver that allows you to use RAM as a disk.

Syntax

```
device = VDISK [size [secs[dirs]]] [/E]
```

Remarks

VDISK partitions some of your computer's memory as a disk. This disk is called a RAM disk or virtual disk and is much faster than either a floppy or hard disk. The RAM disk can use either standard DOS program memory or extended memory (above 1MB) for the disk. Any data on the VDISK is lost when the system power is turned off.

The `size` argument specifies the size of the VDISK in kilobytes. The default is 64KB. The memory selected is allocated from the DOS memory pool, decreasing the amount of memory available for programs unless the extended memory switch is used.

The `secs` argument specifies the sector size in bytes. The default is 512 bytes per sector. This value must be 128, 256, 512, or 1024. All other values are not valid, and the default of 512 bytes is used.

The `dirs` argument specifies the number of root directory entries. The default value is 64 directory entries. There may be any number of root directory entries between 2 and 1024. If an odd number is given, it is rounded up to the nearest multiple of 16 to fill the entire sector.

The `/E` argument causes VDISK to use extended memory (memory above the 1MB boundary) instead of DOS program memory for the disk.

The VDISK driver increases the resident size of DOS.

Note: Interrupts are turned off during the transfer of data from extended memory to conventional memory.

Examples

```
device = VDISK.SYS
```

Builds a 64KB RAM disk in DOS memory.

```
device = C:\DOS\VDISK.SYS 220 /E
```


Builds a 220KB RAM disk in extended memory. The VDISK device driver is loaded from the C: drive and the \DOS directory. VDISK assumes the default 512 byte sector size and 64 directory entries.

```
device = VDISK.SYS 45 128 18
```

Builds a 45KB RAM disk in DOS memory. There are 128 byte sectors and 18 root directory entries.

VER

Internal Command

The VER command displays the version number of the ROM-DOS in use and allows revision of this version number.

Syntax

```
VER [n.nn] [/R]
```

Remarks

If a new version number is specified, two digits after the decimal are required. Note that this command revises only the record of the DOS version number; it does not change the actual operating system loaded in the computer.

The version command shows both the version of the VER command itself and the version of DOS in operation.

Option

The /R option shows the full version and revision number of ROM-DOS.

Example

```
VER 5.0
```

Changes the record of the current DOS version in use to DOS 5.0. Any programs that are executed, following this command, recognize that DOS 5.0 is running.

VERIFY

Internal Command

The VERIFY command displays or modifies the VERIFY state.

Syntax

```
VERIFY [ON | OFF]
```

Remarks

The VERIFY command does not perform any data verification (same as the COPY /V option). It is included to provided batch file compatibility.

VERSION.SYS

CONFIG.SYS Command

VERSION.SYS modifies the version number that ROM-DOS reports. This device performs the same function as the Internal VER command. The difference is that VERSION.SYS allows the change to occur during CONFIG.SYS processing so that version-specific device drivers can load properly.

Syntax

```
DEVICE=VERSION.SYS n.nn
```

Remarks

Specify the new version number, *n.nn*, with two digits after the decimal. Note that this command revises only the DOS version number record; it does not change the actual operating system loaded in the computer.

The version number change can be verified after booting using the VER command.

Example

```
DEVICE=VERSION.SYS 5.0
```

Changes the record of current DOS version in use to DOS 5.0. Any programs that are executed, following this command, recognize that DOS 5.0 is running.

VOL

Internal Command

The VOL command displays the volume label on a specified disk.

Syntax

```
VOL <drive:>
```

Remarks

If you do not specify a drive, the current drive is assumed. VOL does not allow the setting of volume labels. Refer to the LABEL command on page 62 for instructions on setting the volume labels.

Examples

```
VOL
```

Causes ROM-DOS to display the volume label on the default drive, which is the A: drive.

```
VOL C:
```

Causes ROM-DOS to display the volume label on the C: drive.

XCOPY

External Command

The XCOPY command copies multiple files and, optionally, subdirectories from one disk to another.

Syntax

```
XCOPY [source] [target] [/options]
```

Remarks

Use the XCOPY command to copy multiple files and subdirectories, if they exist.

The *source* and the *target* parameter are complete drive-path and file-specification descriptions. If you do not specify a path, XCOPY assumes the default path. If a filename is not specified, then *.* is assumed.

The ATTRIB command may be used to modify the archive bit for the various XCOPY options that check the archive status of files. Refer to the ATTRIB command on page 28 description for instructions.

Options

The /A option copies only source files that have the archive bit set in them. The archive is not reset.

The /D<mm-dd-yy> option copies only those files with a date later than that specified.

The /E option creates subdirectories on the target even if they are empty.

The /M option copies only those source files that have the archive bit set. Once the source file is copied, the archive bit is reset.

The /P option prompts before each file is copied. The prompt appears as follows; enter Y to copy the file:

```
C:\COMMAND.COM (Y/N)?
```

The /S option copies files in subdirectories of the source directory.

The /V option verifies each write to the disk.

The /W option waits before starting to copy files and prompts with the following message.

```
Press any key to begin copying file(s)
```

Example

```
XCOPY \bin\*.exe a: /a
```

Copies all files in the BIN subdirectory to the A: drive that have an .EXE extension and that have the archive bit set.

Appendix A, The TRANSFER Program

TRANSFER is a file-exchange utility that allows embedded systems to upload and download files over a serial link using the XMODEM protocol. The program running on the host system may be either the COMM terminal program, another of Datalight's serial communications utility, or another instance of TRANSFER. Refer to 'Appendix B, The COMM Program' for information regarding the COMM program.

TRANSFER may be used with the Datalight BIOS to TRANSFER files by means of the console, in cases where the console is implemented by means of a serial port. In this case, TRANSFER uses BIOS Int 10h function E and Int 16h functions 0 and 1. In systems having a BIOS that does not supply a remote console, TRANSFER may also be used to transfer files over the same serial link as that used for the CTTY console. A specific serial port (COM1, COM2, and so on) can also be specified for TRANSFER to use for file transfers.

To move a file between systems, run TRANSFER on the target system. Either TRANSFER or COMM may be run on the host PC. If COMM is running on the host PC, press the PgUp key on the PC for COMM to send a file to the target system. COMM prompts for the filename and the protocol for TRANSFER; specify the Xmodem protocol. If you are using TRANSFER on the host PC, select the COM port, the baud rate, and specify either send or receive.

Run TRANSFER as follows:

```
A>TRANSFER [Options] FileName
```

The *FileName* parameter specifies the file to be uploaded or downloaded. A path and drive letter may precede the filename. Wildcards are not allowed in the *FileName* parameter.

The options for TRANSFER are listed in the following table.

Option	Description
/S	Sends a file.
/R	Receives a file.
/B#	Sets the baud rate. The <i>rate</i> number may be 300, 1200, 2400, 4800, 9600, 19200, 38400, 57600, or 115200. The default rate is 9600. Specifying the baud rate causes TRANSFER to use a serial port rather than the default console. The default port is COM1; it can be changed using the /COM option.
/BC	Uses the BIOS console to transfer files (instead of CTTY).
/COM#	The /COM# tells TRANSFER to not Disable use of the console and allow the user to select the COM port. The COM number (#) may be either 1, 2, 3 or 4. This option (as well as /B#) causes TRANSFER to use interrupt driven serial I/O. An INS8250/16450/16550 or compatible UART is assumed at standard PC addresses.

Option	Description
	If the baud rate option is not used along with the /COM option, the default baud rate is 9600.
/Q	Prevents the display of the output to the screen.
/IRQ	Allows changing of the COM port IRQ value from the default setting. The default values are IRQ4 for COM1 and COM3; IRQ3 for COM2 and COM4.

When transferring files over the console, TRANSFER uses DOS calls, by default, to allow operation with CTTY. On some smaller systems it may be preferable to use a BIOS console interface to achieve higher throughput. The /BC option tells TRANSFER to use the BIOS' console interface rather than that of DOS.

TRANSFER Program Examples

The following example receives a file via the console. The data of the file is placed on drive B: in a file named *file.dat*.

```
A:>transfer /r B:file.dat
```

This example sends the file JUNK.ABC over COM4 at 1200 baud, using IRQ 11.

```
A:>transfer /s /B1200 /COM4 /IRQ11 junk.abc
```

The following two examples show the use of TRANSFER on both the host PC and the target system. The file ED.EXE is sent from the host PC to the target system. The file received on the target system is named VI.EXE.

Target system command:

```
A:>TRANSFER /r B:VI.EXE
```

Host PC system command:

```
A:>TRANSFER /s C:\BIN\ED.EXE
```

Appendix B, The COMM Program

The COMM communications program provides the ability to communicate with a remote ROM-DOS system. COMM supports Xmodem file transfer, autodialing, Zmodem, and terminal emulation and time zones.

Command Line Options

All command line options must be separated by a space.

Option	Description
/B#	Sets the baud rate to # on startup. The available baud rates are 300, 1200, 2400, 4800, 9600, 19200, 38400, 57600, and 115200.
/COM#	Sets the communications port to COM1 or COM2; both are supported.
/8N1	Sets the serial port to 8 data bits, no parity, one stop bit.
/7E1	Sets the serial port to 7 data bits, even parity, one stop bit.
/8N2	Sets the serial port to 8 data bits, no parity, two stop bits.
/8O1	Sets the serial port to 8 data bits, odd parity, one stop bit.
/8E1	Sets the serial port to 8 data bits, even parity, one stop bit.

You can reverse the placement of the parity and data bits on the command line. For example, /8N1 is equivalent to /N81.

Environment Variables

The environment variable COMM is supported, which may set certain communications parameters. The switches are identical to the command line options, for example:

```
SET COMM= /COM2 /B2400 /7E1
```

Causes COMM to start using COM2, at 2400 baud, with 7 data bits, even parity, and 1 stop bit. If new options are specified on the command line, they override the environment variable settings. Invalid options are ignored.

An additional environment variable for time zones is also supported. The TZ variable allows you compensate for time zone differences when sending and receiving files and when the time stamp on a received file is critical. This variable only affects transfers done with the Z-modem protocol. X-modem transfers are not affected. By default, if no time zone is set, the Datalight utilities COMM and RSZ assume Greenwich Mean Time (GMT).

Setting the TZ variable is not necessary when using all programs. If you are transferring files between two Datalight utilities, the file time stamp is not affected. Some utilities, such as Windows Hyper-terminal, automatically convert the time stamp on the file to GMT and assumes that the receiving program will adjust the time to the correct local time upon receipt.

The syntax for the TZ environment variable is:

```
SET TZ= <abbreviation> +/- value
```

Abbreviation represents any three-letter abbreviation for the chosen time zone. The variable serves as a reminder to the user. For example, if setting the time zone for Pacific Standard Time, the variable could be set as PST; and for Eastern Standard Time as EST. The abbreviation is only a placeholder in the syntax for the TZ variable. There are no incorrect abbreviation choices as long as only three letters are used.

Value represents the number of hours this time zone varies from GMT. For example, the west Coast of the United States is -8 hours relative to GMT. This value may have to be adjusted to compensate for daylight savings time. There should be no spaces between the abbreviation, plus or minus sign, and the value. Some examples are:

```
SET TZ=PST-8
SET TZ=CMT-3
SET TZ=GMT+2
```

If an incorrect format for the time zone is entered, the default of GMT is used.

On a desktop PC running Windows programs, such as Hyper-terminal, determining the time zone is part of the setup of the operating system. However, if COMM is run from a DOS box, the TZ variable still will need to be set on the target machine.

COMM Commands

Enter most commands by pressing an Alt-key combination. Some commands take effect immediately (such as changing the baud rate), while others require further information (such as a filename) before continuing.

If you do not want to execute a command, or want to stop a command while it is running (such as a file transfer), press the Esc key to return to terminal mode.

Command	Description
Alt+B	Sets the baud rate. This command toggles between all the available baud rates. Continue to press Alt+B until the desired baud rate appears on the status line at the bottom of the display.
Alt+C	Clears the display.
Alt+D	Autodial allows entry of number to be dialed. Press Enter to redial the previous number.
Alt+E	Toggle echo (duplex). Press Alt+E to toggle the duplex between full (echo off) and half (echo on).
Alt+H	Hangs up if the modem is capable of hanging up with an ATH0 command.
Alt+P	Toggles through the available parameters allowing settings to be made. Esc cancels the command.
Alt+T	When enabled, pressing the Enter key generates a CR/LF instead of just a CR.

Command	Description
Alt+X	Exits the program. This command does not drop the carrier, so use this command if you need to do MS-DOS operations while online. You can run COMM again without losing the carrier and continue with telecommunications.
PgUp	Sends a file to a remote computer, giving you the option of either Xmodem or ASCII file transfer protocols. Esc cancels at any time during the transfer.
PgDn	Receives a file using the Xmodem or ASCII file transfer protocol. Press Esc to cancel at any time during the transfer.

Terminal Emulation

Currently, COMM supports a subset of the ANSI escape codes that compose the only terminal emulation available. These escape codes, A, B, C, D, H, J, and K, should meet most needs since the emulation includes such features as cursor positioning and erase to the end of the line and/or page.

File Transfer Recovery with Zmodem Protocol

The Zmodem file transfer protocol has the ability to resume a set of file transfers at the point of interruption, such as in the case of a call hang-up or disconnected cable. In the event of a failed Zmodem upload or download, run COMM as follows to resume the file transfer:

- Press the PgDn key to initiate a receive-file operation
- Select Zmodem in the file transfer option list.
- Select Y to enable the ZMODEM crash recovery option.

Auto downloads do not use crash recovery.

Appendix C, The RSZ Program

RSZ.EXE is a Zmodem file transfer utility used to transfer files over a serial port to another machine running the Zmodem file transfer protocol. RSZ.EXE can be used in place of the COMM program and can be started from within a DOS batch file to send and receive files. In addition, RSZ.EXE does not require that the system have a video display as does the COMM program. RSZ.EXE uses approximately 24KB of RAM. The syntax for RSZ is:

```
RSZ /Pn /Bn /Hn /Fn /[R][S file1 [file2 ...]]
```

Some examples of RSZ usage include:

```
RSZ /R
RSZ /P3 /B115200 /H2 /C /F0 /S a.b lmnop z.*
```

RSZ Program Options

All command line options must be separated by a space.

Option	Description
/P	Port number:n = 1, 2, 3, or 4 for COM1 to COM4 (default setting is 1 for COM1)
/B	Baud rate:n = 50,110,300,..115200. Always N81 when changed. If this option is not specified, program uses the current port parameters.
/Inn	IRQ Numbers – valid IRQ selections are 3 – 15. Default value for COM2 and COM4 is IRQ3; the default value for COM1 and COM3 it is IRQ4.
/H	Handshaking options. Both sides must use the same value: 0 = none (default), 1 = software, 2 = hardware.
/F	File management options (all files are binary): 0 = skip, 1 = resume, 2 = make duplicate, 3 = replace (default)
/R	Receive files specified by sender using Zmodem protocol.
/S	Send the specified files using Zmodem protocol. Wildcards are allowed.
/V	Verbose switch forces the status display to ON when the console is redirected to a second COM port, and allows the Esc key to break out of a transfer. Esc will not work when RSZ is using the same COM port as the remote console.
/Q	Do not display/send status information while transferring files. This option is automatically selected when running CTTY or when running ROM-DOS on the Datalight BIOS to prevent errors due to the placement of status data in the transfer data stream.

File Transfer Recovery

For Zmodem file transfer recovery to work after a failed transfer, you must use RSZ with the /F1 option on the receiver command line. This option selects the resume file management option.

Time Zones

An additional environment variable for time zones is also supported. The TZ variable allows you compensate for time zone differences when sending and receiving files and when the time stamp on a received file is critical. This variable only affects transfers done with the Z-modem protocol. X-modem transfers are not affected. By default, if no time zone is set, the Datalight utilities COMM and RSZ assume Greenwich Mean Time (GMT).

Setting the TZ variable is not necessary when using all programs. If you are transferring files between two Datalight utilities, the file time stamp is not affected. Some utilities, such as Windows Hyper-terminal, automatically convert the time stamp on the file to GMT and assumes that the receiving program will adjust the time to the correct local time upon receipt.

The syntax for the TZ environment variable is:

```
SET TZ= <abbreviation> +/- value
```

Abbreviation represents any three-letter abbreviation for the chosen time zone. The variable serves as a reminder to the user. For example, if setting the time zone for Pacific Standard Time, the variable could be set as PST and for Eastern Standard Time as EST. The abbreviation is only a placeholder in the syntax for the TZ variable. There are no incorrect abbreviation choices as long as only three letters are used.

Value represents the number of hours this time zone varies from GMT. For example, the west coast of the United States and Canada is -8 hours relative to GMT. This value may have to be adjusted to compensate for daylight savings time. There should be no spaces between the abbreviation, plus or minus sign, and the value. Some examples are:

```
SET TZ=PST -8
SET TZ=CMT -3
SET TZ=GMT+2
```

If an incorrect format for the time zone is entered, the default of GMT is used.

On a desktop PC running Windows programs, such as Hyper-terminal, determining the time zone is part of the setup of the operating system. However, if COMM is run from a DOS box, the TZ variable still will need to be set on the target machine.

Appendix D, NED (Editor) Program

The NED editor is a menu-based text editor available for use with ROM-DOS. This editor is similar to other desktop editors but has special functions designed for use in editing C-source and assembly code.

Starting the Editor

To start the editor, enter

```
NED [filename] [filename]
```

NED may be initiated with or without filename arguments. Wildcard file specifications are allowed.

Up to ten files can be entered on the command line. If NED is run without arguments, it loads all files accessed during the last editing session, returning you to the exact position in the file. You can switch between the open files.

You can also enter

```
NED @errfile
```

where *errfile* is the name of your compiler error output file. NED loads all files that had errors and allows you to move between errors.

Once NED is running, you may load files into memory by using the File/Open menu command. File/Reload replaces the current file with a new file or reloads a new copy of the same file. File/Reload confirms before replacing an unsaved file.

Basic Editor Operation

NED uses the standard Windows interface for cut, copy, and paste operations. Del and Shift+Del both move the selected block to the clipboard. There is no true undo command, but Ctrl+V or Shift+Ins may be used to paste the clipboard contents to the current cursor position. Table 1 lists the all the default shortcut keys.

If a search string is all lowercase, NED treats it as a case-insensitive search. If a search string contains any uppercase letters, it is case sensitive. The replacement string is inserted exactly as entered. Repeating a Search command repeats the last Forward or Backward Search operation, not the last Replace operation.

There is one bookmark for all files. Once the bookmark is set, going to the bookmark returns you to the file and position where you set it.

The Indent and Remove-indent (referred to as Undent in the Options/Do Command) commands work on tabs. Indent inserts a tab at the beginning of the current line, or if a block is active, at

the beginning of each line in the block. Remove-indent removes the first tab from the current line or from each line in the block. If there are no tabs, Remove-indent has no effect.

Toggle case inverts the case of the current character if no block is active. If a block is active, Toggle case sets the entire block to uppercase if the first character was lower and to lowercase if the first character was uppercase.

Tabs are currently set to 3 for .C, .H, .CPP, .HPP, and .T files. They are set to 8 for all other files.

File/Print prints the current block if there is one, otherwise it prints the current file. NED prompts for a device to print to, which may be a filename. Tabs are expanded to spaces.

The Options/Do Command is intended primarily for debugging. This command allows you to execute any editor command by choosing it from a menu list.

The macro commands (Record Macro/Play Macro) allow you to define a sequence of keystrokes that can be repeated repetitively. Select Record Macro (ALT=), enter the keystrokes, then press ALT= again. The macro sequence can be played by selecting Play Macro or by pressing ALT-. Keyboard bindings are saved in NED.CFG in the same directory as NED.EXE. NED.CFG also contains the list of active files and positions.

If you record and play a recursive macro, it plays continuously.

If you press an invalid key on a menu, NED operates as if you pressed enter.

If you run out of memory, such as when you have more than 300KB of files open, NED returns to DOS.

Remote Editing

NED will operate as a full-screen editor, even through a serial port, this using ANSI Escape codes. Any communication program capable of emulating an ANSI terminal will work with NED in remote mode.

NED automatically detects if the console is redirected through a serial port, either via CTTY, or when using the Datalight BIOS with a serial console. NED does not support ANSI key codes, so the use of PC function keys and standard PC cursor keys is supported through control keys. To use the special control keys, copy the NEDREMOT.CFG to the name NED.CFG in the same directory that NED.EXE is run from on the target system. This NED configuration file was created using the Option Map a key... function, and can be modified in the same manner.

Always use the Esc key to get to the menus. Use Ctrl-K to enable/disable blocking mode when selecting text. The remote key mapping is provided in the following list.

Ctrl-A	Left arrow
Ctrl-B	Find backward

Ctrl-C	Copy to clipboard
Ctrl-D	Go to mark
Ctrl-E	Delete to end of line
Ctrl-F	Find forward
Ctrl-G	Go to line number
Ctrl-H	Delete previous character (same as Backspace)
Ctrl-I	Insert tab (same as Tab)
Ctrl-J	Page down
Ctrl-K	Toggle block mode (for cutting to clipboard)
Ctrl-L	Delete the entire line
Ctrl-M	Insert return (same as Enter)
Ctrl-N	Toggle insert/overwrite mode
Ctrl-O	Open a file
Ctrl-P	Toggle through previous 3 positions
Ctrl-Q	Home
Ctrl-R	Search/Replace
Ctrl-S	Right arrow
Ctrl-T	Top of document
Ctrl-U	Page up
Ctrl-V	Insert clipboard at cursor
Ctrl-W	Up arrow
Ctrl-X	Delete to clipboard
Ctrl-Y	End of document
Ctrl-Z	Down arrow
Ctrl-[Menu/Cancel operation (same as Esc)
Ctrl-]	Brace match
Ctrl-\	Do a command (opens a menu with all NED commands)

Troubleshooting Remote NED

If nothing appears on the terminal screen, check the baud rate of the terminal program, check the serial cable (should normally be a null-modem cable), and check that the terminal program is set to emulate ANSI escape codes.

In some cases, it is possible for the remote auto-detect to fail. In this case, run the program NEDREMOT prior to running NED. NEDREMOT sets a word at 40:E8h to inform NED to operate remotely.

Default Hot Keys

Many of the editor commands can be accessed directly by pressing key combinations. For example, press ALT-X to exit the editor and save any open files. The following table lists the default hot keys. You can redefine the commands and keys using the Bind HotKey command available on the Options Menu.

Key	Function	Key	Function
Alt-Q	Quit without saving	F1	Help
Alt-X	Exit, saving as needed	F7	Load file into current buffer
Ctrl-A	Search again	F9	Save file
Ctrl-B	Search backward	F10	Exit asking for save as needed
Ctrl-C	Copy the block to clipboard	Left-Arrow	Left one character
Ctrl-D	Find the mark	Right-Arrow	Right one character
Ctrl-E	Erase to end-of-line	Up arrow	Up one line
Ctrl-F	Search forward	Down arrow	Down one line
Ctrl-G	Go to a line number	Home	Beginning of line
Ctrl-I	Indent the block	End	End of line
Ctrl-K	Toggle block mode	Page Up	Up one screen
Ctrl-L	Delete line to the clipboard	Page Down	Down one screen
Ctrl-M	Set the mark	Center (5)	Center the cursor onscreen
Ctrl-N	Read a file into a new buffer	Ctrl-Left-Arrow	Left one word
Ctrl-P	Move to the previous position	Ctrl-Right-Arrow	Right one word
Ctrl-Q	Quote the next character	Ctrl-Up-Arrow	Up one C function
Ctrl-R	Replace text	Ctrl-Down-Arrow	Down one C function
Ctrl-S	Switch to the next buffer	Ctrl-Home	Scroll toward beginning of file
Ctrl-T	Toggle the case of character(s)	Ctrl-End	Scroll toward end of file
Ctrl-U	Remove indent from the block	Ctrl-Page Up	Beginning of file
Ctrl-V	Insert the clipboard	Ctrl-Page Down	End of file
Ctrl-W	Delete word to the clipboard	Ins	Toggle Insert/Overwrite mode
Ctrl-X	Delete block to the clipboard	Del	Delete character
Ctrl-Z	Cancel the selected block	Backspace	Delete character backward
Alt =	Start/end recording macro	Ctrl-Ins	Copy block to clipboard

Key	Function	Key	Function
Alt -	Playback macro	Ctrl-BackSpace	Delete word backward
Alt-F7	Previous error	Shift-Ins	Insert the clipboard
Alt-F8	Next error	Shift-Del	Delete block to clipboard

Appendix E, Remote Disk Program

The remote disk program allows you to access a disk drive on a remote system via a serial cable and standard PC-style (8250UART) serial port. Remote disk allows added flexibility for diskless systems and systems tight on available space.

In a remote disk setup, one system, the one that shares its drives, is termed the server. The other system, the one that accesses and uses the remote drives, is called the client. The serial ports on both systems must be connected via a null modem cable. Remdisk/Remserv works across a standard 3-pin serial cable, similar to other Datalight serial I/O utilities (COMM and TRANSFER). The cable does not require the CTS/RTS DTS/DTR pins.

Server Program

The server system runs the program REMSERV.EXE that can make a single drive on the server system available to the client. The available drive can be changed at any time by quitting the REMSERV program and then running the program again with a new drive letter. The syntax of REMSERV.EXE is

```
REMSERV.EXE d: [/Bnnnn] [+|-] [/COMn] [/Tnnn] [/S] [/H]
```

where d: represents the letter of the drive the server makes available to the client.

Option	Description
/Bnnnn	Selects the baud rate for transmission. Available baud rates are 300, 1200, 2400, 4800, 9600, 19200, 38400, 57600, and 115000. The default baud rate is 115000.
+/-	The plus sign (+) specifies packet-style transmission and is recommended for any baud rate over 19200. The default setting is to include + for packet transmission. Use the minus sign (-) to specify polling operation under Windows95.
COMn	Selects the communication port. Available ports are 1 and 2. COM1 is the default port.
/IRQn	Set the IRQ for the communications port. Valid settings are 3 – 15. Default is IRQ3 for COM 2 and COM4, and IRQ4 for COM1 and COM3.
/Tnnn	Sets the time-out in the range of 2 to 3,640 seconds.
/S	Instructs REMSERV to run without any display output.
/H	Selects hardware handshaking for flow control. To select drive B: as the available server drive at 115000 baud, packet transmission, using COM1, enter <code>REMSERV B:</code> To set drive C: as the server disk at 9600 baud, without packet-style transmission, on COM2, enter: <code>REMSERV C: /B9600 /COM2</code>

The server program can be terminated at any time by pressing the Esc key. The client can then no longer access the server's drive until the REMSERV program is run again.

Client Program

The program REMDISK runs on the client system and creates a new drive letter for the client. REMDISK uses the next available system drive letter. For example, if the last assigned drive was D:, REMDISK creates drive E:. This drive acts like any other drive, except that it requires the serial port. REMDISK.EXE can be loaded by a DEVICE= command in the CONFIG.SYS file can be entered at the DOS prompt. The syntax for REMDISK is:

```
REMDISK [/U] [/H] [/Bnnnn] [+|-][/Tnnn] [/COMn]
```

Option	Description
/U	Unloads REMDISK from memory, thereby disabling the drive letter and freeing the memory occupied by REMDISK. This option can only be used when REMDISK is installed from the DOS command line. A remote disk installed via CONFIG.SYS cannot be unloaded.
/H	Selects hardware handshaking for flow control.
/Bnnnn	Selects the baud rate for transmission. Available baud rates are 300, 1200, 2400, 4800, 9600, 19200, 38400, 57600, and 115000. The default baud rate is 115000.
+/-	The plus sign (+) specifies packet-style transmission and is recommended for any baud rate over 19200. The default setting is to include + for packet transmission. Use the minus sign (-) to specify polling operation under Windows95.
/Tnnn	Sets the time-out in the range of 2 to 3,640 seconds.
/IRQn	Set the IRQ for the communications port. Valid settings are 3 – 15. Default is IRQ3 for COM 2 and COM4, and IRQ4 for COM1 and COM3.
COMn	Selects the communication port. Available ports are 1 and 2. COM1 is the default port.

To install the REMDISK program from CONFIG.SYS at 19200 baud, on COM1, using packet-style transmission, insert the following line in CONFIG.SYS and then reboot the system (remember to include the full path to find REMDISK.EXE if not located in the root directory).

```
DEVICE=REMDISK.EXE /B19200 +
```

To display a help screen for REMDISK from the DOS prompt, enter

```
REMDISK /?
```

To install REMDISK from the DOS prompt or from a batch file (such as AUTOEXEC.BAT) at 9600 baud, without packet-style transmission, on COM2, enter

```
REMDISK /B9600 /COM2
```

To unload the REMDISK installed from the batch file or the DOS prompt, enter

```
REMDISK /U
```

Using the Remote Disk

To use the remote disk, both REMDISK and REMSERV must be running on their respective systems and must use the same baud rate and packet or nonpacket-style transmission. After starting both programs, you can access the new drive on the client system. You can change the default directory to this new drive, copy files to and from the remote drive, and also run utilities such as CHKDSK on the drive. The remote drive on the server system can be used as any other drive on the client system.

Appendix F, Keyboard Layouts


Keyboard Layouts

The following keyboard charts represent several countries supported by ROM-DOS. If you need a keyboard layout not displayed in this Appendix, please contact Datalight.


Denmark




Finland

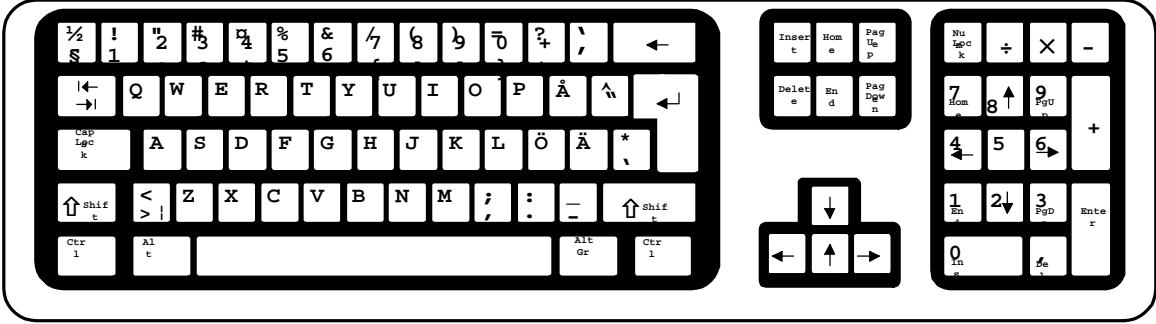


France

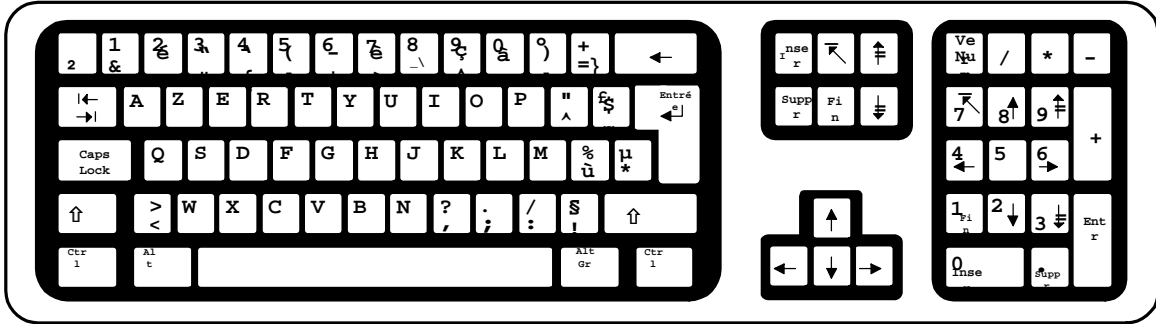


Germany

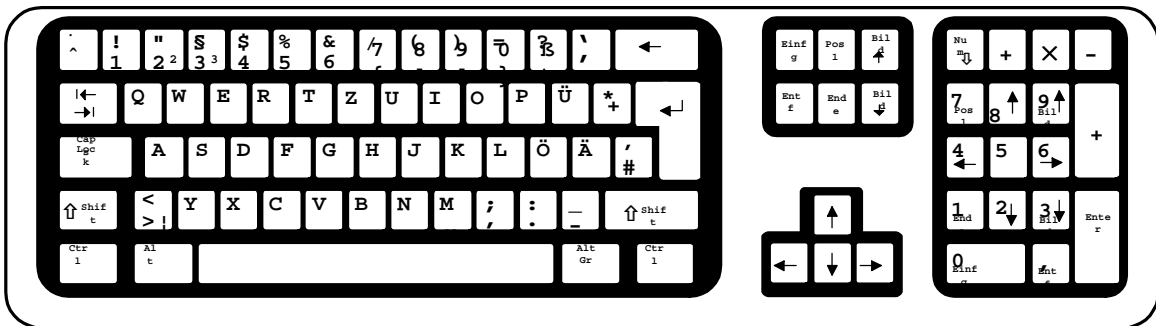


Italy

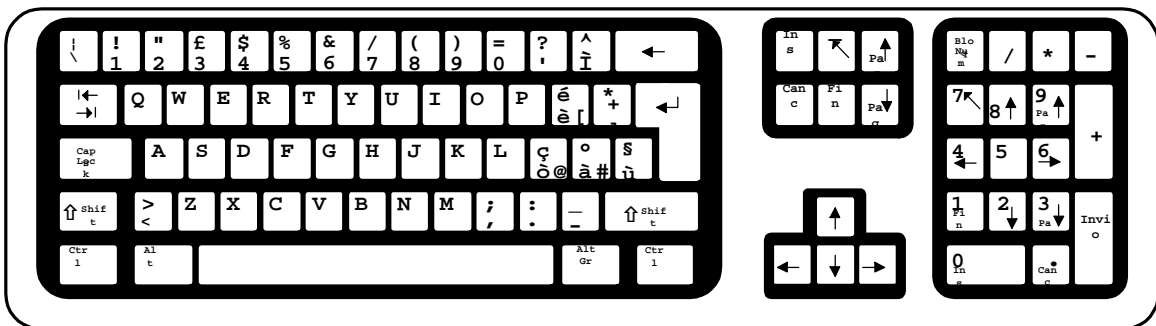


Norway

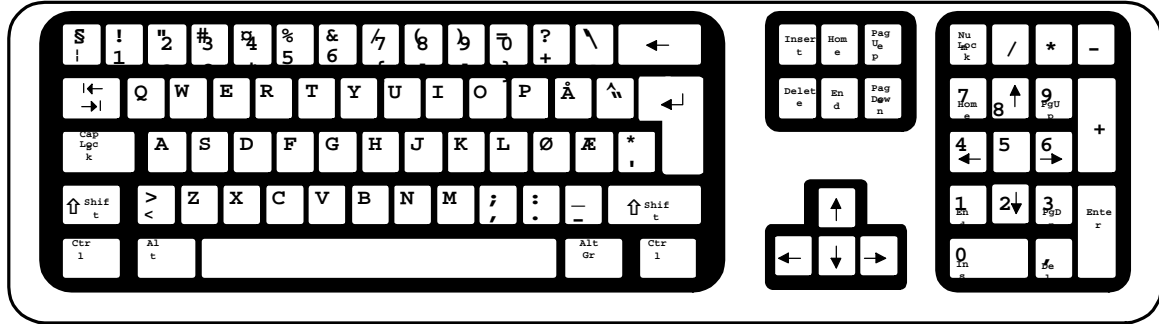


Spain

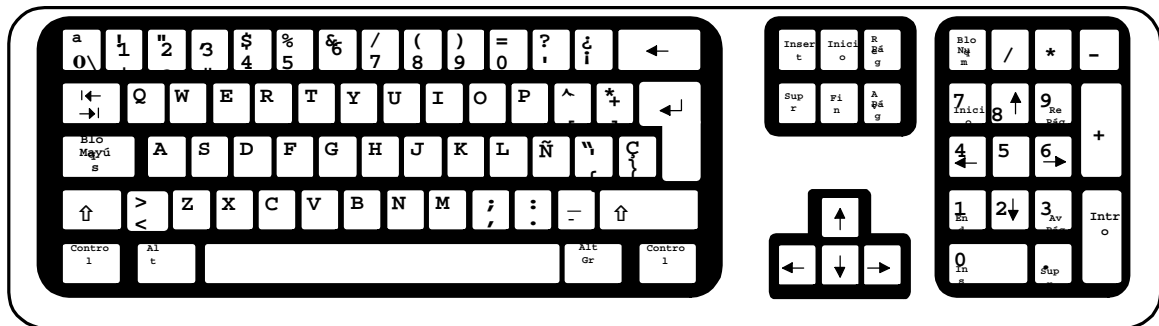


Sweden

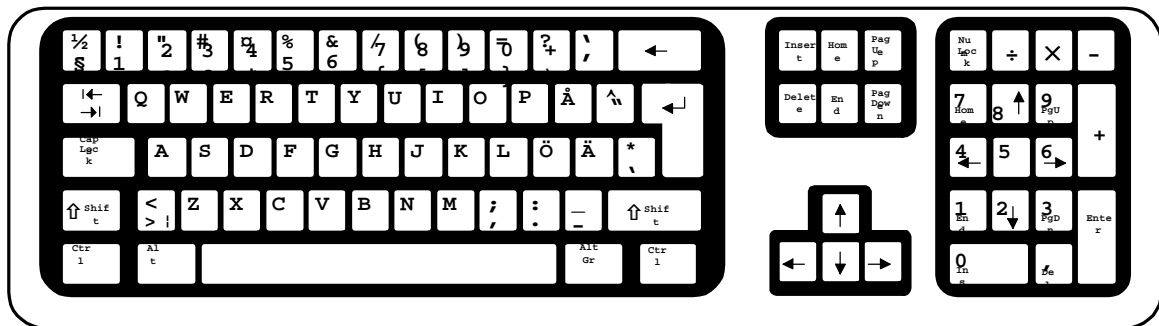

United Kingdom

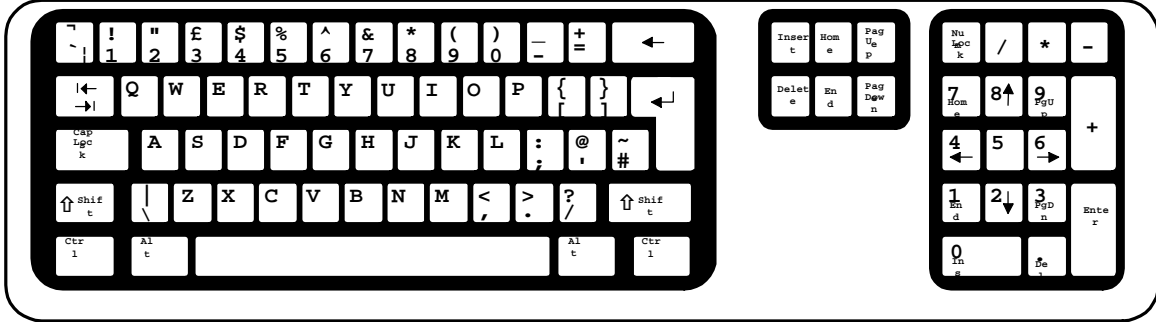

United States

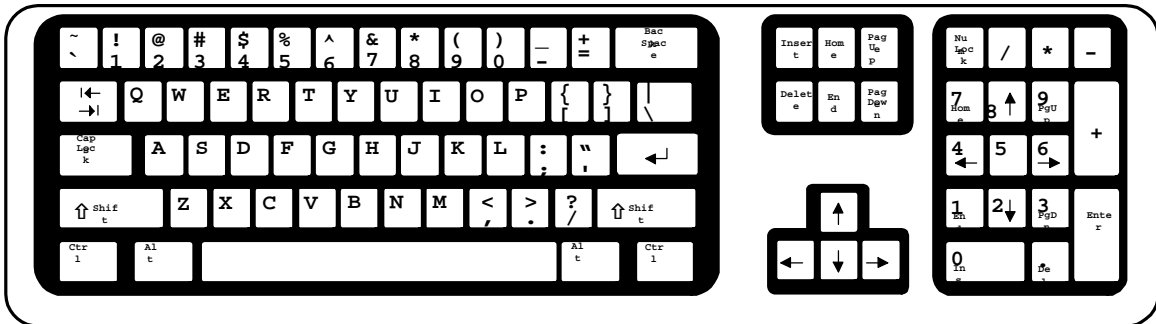

Index

%

% symbol
how to use in a batch file, 13

;

; sign
using in a batch file, 29
using in CONFIG.SYS, 29

?

? symbol
using to pause CONFIG.SYS commands, 28

@

@ sign
using to suppress command echo, 29

A

A20 line control
handling by HIMEM.SYS, 60
ANSI.SYS, 30
APM BIOS
how it fits in the power management
scheme, 76
Archive files
changing with ATTRIB, 31
ATA.SYS, 30
ATTRIB command
using to manage file attributes, 31
AUTOEXEC.BAT
bypassing commands in, 18
CONFIG environment variable, 17
troubleshooting commands in, 18
using to extend menu items, 17

B

BACKUP command
using to using to save files, 32
Batch file commands
;, 29

@, 29
disabling with a, 29
conditional execution with IF, 61
disabling with REM, 79
displaying batch file commands/messages,
50
displaying while executing, 50
executing a secondary batch file, 34
pausing processing of with PAUSE, 75
repeating the execution of with FOR, 57
SHIFT, 84
shifting parameters, 84
transferring control with GOTO, 59

Batch file execution
from withing another batch file, 34

Batch file messages
creating with REM, 79

Batch files
bypassing commands in, 18
clearing the display, 38
commands that can be used in, 14
disabling the user prompt, 37
how to create and use, 13
parameters, 13
preventing echo with @, 29
selecting available user options, 37
specifying allowable input keys, 37
comment text using, 29, 84

BIOS
needed for advanced power management, 76

Boot time problems
stepping through AUTOEXEC.BAT, 18
stepping through CONFIG.SYS, 18

Bootable disk
how to created using SYS, 88

BREAK command
using to expand Ctrl+C operations, 33

BUFFERS command
using to set buffer memory, 34

Bypassing AUTOEXEC.BAT commands
how to, 18

Bypassing CONFIG.SYS commands
how to, 18

C

CALL command
using to start a batch file, 34

- CD command
 - using to switch directories, 35
- CD-ROM drives
 - using MSCDEX.EXE to support, 72
- Changing the command line
 - using specific keys, 8
- CHDIR command
 - using to switch directories, 35
- CHKDSK command
 - using to fix disk errors, 36
- CHOICE command
 - using to set time delay, 37
 - using to set users prompt/keys, 37
- Clock settings
 - changing with the TIME command, 89
- CLS command
 - using to clear the display, 38
- Code page
 - loading different with DISPLAY.SYS, 21, 49
- Code page numbers
 - for different countries, 19
- Code pages
 - using for different keyboards, 19
- Colors
 - setting text and background with MENUCOLOR, 67
- COM ports
 - changing configuration with MODE, 70
- COMMAND command
 - using to start the command processor, 38
- Command interpreter
 - loading other than COMMAND.COM, 83
- Command line
 - batch file parameters, 13
 - how to edit the contents of, 8
- Command line prompt
 - using PROMPT to configure, 78
- Command processing
 - bypassing commands with ?, 28
- Command processor
 - description of, 38
 - how to start, 38
- COMMAND.COM
 - loading a different command interpreter than, 83
 - transferring to floppy disk, 88
- Commands
 - summary of, 25
- CONFIG.SYS
 - bypassing commands in, 18
 - CONFIG environment variable, 17
 - setting the processing level, 15
 - settings for multiple users, 15
 - troubleshooting commands in, 18
 - using the COUNTRY command, 41
- CONFIG.SYS commands, 29
 - changing how CONFIG.SYS executes, 88
 - changing ROM-DOS version number, 93
 - disabling with a, 29
 - configuring ROM-DOS for international use, 41
 - dynamic use of data stacks, 86
 - executing from a secondary file, 73
 - install programs to high memory, 65
 - loading ROM-DOS in high memory, 49
 - loading TSR programs, 62
 - pausing during command processing with ?, 28
 - setting number of open files, 56
 - setting the display colors, 67
 - setting the highest driver letter, 65
 - setting the number of data buffers, 34
 - specifying the number of FCBs, 54
 - the processing of, 15
 - use of the SUBMENU command, 86
 - using INCLUDE for multiple-user setups, 62
 - using to install device drivers, 45, 46, 65
 - using to set for multiple users, 68, 69
 - using to set the command interpreter, 83
 - using to set the NumLock key, 74
- CONFIG.SYS comment text
 - using, 29
- Configuration block
 - using for multiple configurations, 15
- Configuration blocks
 - example of using in CONFIG.SYS, 17
 - including for multiple configurations, 62
 - using for multiple configurations, 62
- Configuring ROM-DOS
 - for multiple users, 15, 68, 69
 - with CONFIG.SYS, 15
- COPY command
 - using to create new disk files, 39
- COUNTRY command
 - using in CONFIG.SYS, 41
 - using to select character set, 19, 20, 41
- COUNTRY identifier
 - for Australia, 22
 - for Belgium, 22
 - for Brazil, 22
 - for Canadian-French, 22
 - for Czech Republic, 22

- for Denmark, 22
- for Finland, 22
- for France, 22
- for Germany, 22
- for Hungary, 22
- for Italy, 22
- for Latin America, 22
- for Netherlands, 22
- for Norway, 22
- for Poland, 22
- for Portugal, 22
- for Russia, 22
- for Spain, 22
- for Sweden, 22
- for Switzerland, 22
- for United Kingdom, 22
- for United States, 22
- for Yugoslavia, 22

CTTY command

- using to redirect input/output, 42

Current directory

- definition of, 6
- using CD or CHDIR to establish, 35

D

Danish keyboard layout, 115

Data buffers

- setting the number of, 34

DATE command

- using to display/set the date, 42

DEFRAG command

- using to optimize disk space, 43

DEL command

- using to erase disk files, 44

DELTREE command

- using to erase disk files, 45

DEVICE command

- using to display/set the date, 45

Device drivers

- about DISPLAY.SYS, 49

- installable, 45, 46, 49, 51, 60, 65, 72, 76, 92

- installing in high memory, 46

- using to support CD-ROM drives, 72

DEVICEHIGH command

- using to install device drivers, 46

DIR command

- setting list size, 47

- setting options with DIRCMD, 47

- using to list disk files, 46

DIRCMD environment variable

- using to set DIR command preferences, 47

Directories

- about the directory system, 6

- recovering with RESTORE, 80

- saving with BACKUP, 32

- using CD or CHDIR to switch to, 35

- using DELTREE to delete, 45

Directories and subdirectories

- changing from one to another, 6

- creating with MKDIR, 69

- definition of the current directory, 6

- deleting with MKDIR, 81

- naming conventions, 6

Directories/subdirectories

- using TREE to list, 90

- using XCOPY to create, 94

Directories/subdirectory

- how to delete, 81

DIRSIZE environment variable

- using to set DIR command preferences, 47

Disk, 46

Disk drives

- accessing remote with

- REMDISK/REMSERV, 111

- checking with CHKDSK, 36

- creating a volume label, 64

- creating multiple with FDISK, 54

- displaying a volume label, 94

- formatting floppy with FORMAT, 57

- formatting/initializing with FDISK, 54

- setting the maximum number of, 65

Disk drives used in computers

- description of, 2

- naming conventions, 7

Disk drives, using SUBST to map drive

- letters, 87

Disk files

- checking free disk space, 36

- creating and changing with NED.EXE, 105

- definition of, 5

- displaying directory contents, 46, 90

- displaying text using MORE, 71

- displaying the contents of, 90

- how to transfer over a serial link, 97, 99,

- 103

- locating text within using FIND, 56

- locking by loading SHARE.EXE, 82

- making hidden with ATTRIB, 31

- making read-only with ATTRIB, 31

- managing with directories, 6

- recovering with RESTORE, 80

- saving with BACKUP, 32
 - sharing by loading SHARE.EXE, 82
 - sorting text within using SORT, 84
 - specifying the number of open with FILES, 56
 - using COPY to create, 39
 - using DEFRAG to optimize disk space, 43
 - using DEL to delete, 44
 - using DELTREE to delete directories, 45
 - using DISKCOPY to create, 48
 - using ERASE to delete, 53
 - using in place of keyboard input, 9
 - using MOVE to relocate or rename, 72
 - using PRINT to print copies, 77
 - using REN to rename, 80
 - using to receive system output, 9
 - using XCOPY to create, 94
 - Disk partitions
 - creating with FDISK, 54, 57
 - DISKCOPY command
 - using to create new disk files, 48
 - Display colors
 - setting text and background, 67
 - DISPLAY.SYS
 - using to display a different code page, 21
 - using to display code pages, 49
 - using to display international characters, 49
 - Displaying file lists
 - using DIR to list, 46
 - Displaying subdirectories
 - using TREE to list, 90
 - DOS command
 - using to load ROM-DOS, 49
 - Downloading files
 - using COMM and a serial link, 99
 - using RSZ and a serial link, 103
 - using TRANSFER and a serial link, 97
 - Duplicating directories/files
 - using XCOPY to create new, 94
 - Duplicating files
 - using COPY to create new, 39
 - using DISKCOPY to create new, 48
- E**
- Echo batch file commands
 - preventing with @, 29
 - ECHO command
 - using to display batch file messages/commands, 50
 - Editing text files
 - with the NED.EXE text editor, 105
 - EGA.CPI, 51
 - EMM386.EXE
 - using to support expanded memory, 51
 - Environment, 78
 - Environment variables
 - CONFIG.SYS, 17
 - DIRCMD, 47
 - DIRSIZE, 47
 - PATH, 74
 - setting PATH and PROMPT, 19
 - setting with SET, 82
 - ERASE command
 - using to erase disk files, 53
 - Erasing files
 - using DEL to delete, 44
 - using DELTREE to delete directories, 45
 - using ERASE to delete, 53
 - EXIT command
 - using to terminate a nested ROM-DOS session, 54
 - Expanded memory
 - using EMM386.EXE to support, 51
 - Extended memory
 - using HIMEM.SYS to support, 60
- F**
- F5 key
 - using to bypass CONFIG/AUTOEXEC commands, 18
 - F8 key
 - using to step AUTOEXEC.BAT commands, 18
 - using to step CONFIG.SYS commands, 18
 - FCBS command
 - specifying number of file control blocks, 54
 - FDISK command
 - using to format a hard disk, 54
 - File control blocks
 - specifying the number of with FCBS, 54
 - File names
 - how to create using wildcard characters, 7
 - Files
 - creating and changing with NED.EXE, 105
 - displaying the contents of, 90
 - fixing errors with CHKDSK, 36
 - how to transfer over a serial link, 97, 99, 103
 - locating text within using FIND, 56

locking by loading SHARE.EXE, 82
making hidden with ATTRIB, 31
making read-only with ATTRIB, 31
naming conventions explained, 5
recovering with RESTORE, 80
saving with BACKUP, 32
sharing by loading SHARE.EXE, 82
sorting text within using SORT, 84
using COPY to create, 39
using DEL to delete, 44
using DELFRAG to optimize disk space, 43
using DELTREE to delete, 45
using DIR to list directory contents, 46
using DISKCOPY to create entire disk, 48
using ERASE to delete, 53
using in place of keyboard input to the system, 9
using MOVE to relocate or rename, 72
using PRINT to print copies, 77
using REN to change the name of, 80
using to receive display/printer data, 9
using XCOPY to create, 94

FILES command
specifying number of file control blocks, 56

FIND command
using to search within disk files, 56

Finnish keyboard layout, 115

Flash memory
using as a disk drive, 3

FOR command
using to repeat batch file commands, 57

FORMAT command
using to format a floppy disk, 57

French keyboard layout, 116

G

German keyboard layout, 116

GOTO command
using to transfer control in batch files, 59

H

HELP command
using to obtain ROM-DOS help, 59

Help information on ROM-DOS
displaying with the HELP command, 59

Hidden files
making so with ATTRIB, 31

High memory
using EMM386.EXE to support, 51

using HIMEM.SYS to support, 60

High memory area (HMA)
using the DOS command to load ROM-DOS, 49

HIMEM.SYS
using to support extended memory, 60

COMM program, 99

RSZ program, 103

I

IF command
conditional execution of batch file commands, 61

INCLUDE command
using to include configuration blocks, 62

INSTALL command
using to load TSR programs, 62

International use
configuring ROM-DOS for, 19, 41, 63

Italian keyboard layout, 116

K

KEYB
using to select a different keyboard/country, 21

KEYB command
using to alter keyboard layouts, 63

Keyboard input
how to redirect from a file, 9

Keyboard layout
Denmark, 115
Finland, 115
France, 116
Germany, 116
Italy, 116
loading different countries with KEYB, 21
Norway, 117
setting for different countries, 21
Spain, 117
Sweden, 117
United Kingdom, 118
United States, 118

Keyboard layouts
altering with KEYB, 63

KEYBOARD.SYS, 64

Keyboards code pages
using for different keyboards, 19

KEYBRD2.SYS, 64

L

LABEL command

using to create/delete a disk label, 64

LASTDRIVE command

using to set the highest drive letter, 65

LOADHIGH command

using to install programs in high memory,
65

Loading programs

installing in high memory, 65

LONGDIR.EXE, 66

M

MD command

using to create a new directory/subdirectory,
69

MEM command

using to display the amount of memory, 66

Memory configuration

using expanded memory, 51

using extended memory, 60

Memory disk

creating a RAM disk with VDISK, 92

Menu blocks

using for multiple configurations, 16, 62

Menu configuration block

using to define menu items, 86

Menucolor

example of using in CONFIG.SYS, 16

MENUCOLOR command

using to set text/background colors, 67

Menudefault

example of using in CONFIG.SYS, 16

MENUDEFAULT command

using to set default menu, 68

Menuitem

example of using in CONFIG.SYS, 16

MENUIITEM command

using to specify startup menu, 69

MKDIR command

using to create a new directory/subdirectory,
69

MODE command

using to change a COM port/printer/display,
70

MORE command

using when displaying text files, 71

MOVE command

using to move/rename new files/directories,
72

Moving files

using MOVE to relocate/rename, 72

MSCDEX.EXE

using to support CD-ROM drives, 72

N

Naming conventions

for batch files, 13

for disk drives, 7

for disk files, 5

using wildcard characters, 7

Naming files

using REN to rename existing, 80

NED.EXE editor program

using to create/alter text files, 105

NEWFILE command

using to switch from CONFIG.SYS, 73

Norwegian keyboard layout, 117

NUMLOCK command

using to set the NumLock key, 74

P

Parameters

for batch files, 13

Partitions for disk drives

creating with FDISK, 54

PATH Command

using to set the environment variable, 74

PAUSE command

halting execution of batch file commands,
75

POWER.EXE

using to implement power management, 76

PRINT command

using to print files, 77

Printer ports

changing configuration with MODE, 70

Printing files

using PRINT to output copies, 77

Processing AUTOEXEC.BAT

commands

how to, 18

Processing CONFIG.SYS commands

how to, 18

Programming

through the use of batch files, 13

PROMPT command
using to alter the command line prompt, 78

R

RAM disk
creating a memory-based disk, 92
Random Access Memory (RAM)
definition of, 2
RD command
using to delete a directory/subdirectory, 81
Read Only Memory (ROM)
definition of, 2
using as a disk drive, 3
Read-only files
making so with ATTRIB, 31
Redirecting input/output
using the CTTY command
to, 42
REM command
inserting comments in batch files, 79
REMDISK/REMSERV
using to access remote disk drives, 111
Remote disk drives
accessing with REMDISK/REMSERV, 111
Remote disk utility
using to access remote disk drives, 111
REMQUIT.EXE, 79
REN command
using to rename disk files, 80
RESTORE command
using to recover saved files, 80
RMDIR command
using to delete a directory/subdirectory, 81
RMDIR/RD command
using to delete an empty directory, 81
ROM-DOS
changing the displayed version number, 93
configuring for international use, 19, 41, 63
configuring for multiple users, 15, 68, 69
configuring with CONFIG.SYS, 15
definition/description of, 1
displaying the version number of, 93
transferring system files, 88
ROM-DOS memory contents
displaying with MEM, 66

S

Searching files
using FIND to examine contents, 56

SET command
using to set, remove, display environment variable, 82
SHARE command
using to allow file sharing, 82
SHELL command
using to start a command interpreter, 83
SHIFT command
using to shift batch file parameters, 84
SORT command
using to sort contents of text files, 84
Spanish keyboard layout, 117
STACKDEV.SYS, 85
STACKS command
using to set dynamic data stacks, 86
SUBMENU commands
using to define menu items, 86
SUBST command
using to substitute disk drive letters, 87
Swedish keyboard layout, 117
SWITCHES command
using to control CONFIG.SYS execution, 88
SYS (System) command
using to copy system files to a disk, 88
System files
changing with ATTRIB, 31
System output
how to redirect to a file, 9
System prompt
definition and contents of, 8

T

Terminal emulation
using COMM, 99
Terminate and stay resident programs
loading with INSTALL, 62
TIME command
using to set the internal clock, 89
Time settings
changing with the TIME command, 89
transfer, 97, 99, 103
TRANSFER program
how to transfer files using, 97
TREE command
using to list directories/subdirectories, 90
TSR, 62
TSR programs
loading with INSTALL, 62
TYPE command
using to display the contents of text files, 90

U

U.K. keyboard layout, 118
U.S. keyboard layout, 118
UMBLINK.SYS, 91

V

VDISK.SYS
 using to create a RAM disk, 92
VER command
 using to display ROM-DOS version number,
 93
VERSION.SYS
 using to display ROM-DOS version number,
 93
VOL command
 using to display a disk label, 94
Volume labels
 how to create and delete, 64
 how to display, 94

W

Wildcard characters
 using to create file names, 7

X

XCOPY command
 using to create new directories/files, 94
Xmodem file transfers
 using COMM, 99

Z

Zmodem file transfers
 using COMM, 99